GEORGIA TECH GT-VSNI
VLSI DESIGN VERIFICATION DOCUMENT

VLSI DEVELOPMENT REPORT

REPORT NO. VDR-0142-90-002

MAY 23, 1990

GUIDANCE, NAVIGATION AND CONTROL
DIGITAL EMULATION TECHNOLOGY LABORATORY

Contract No. DASG60-89-C-0142

Sponsored By

The United States Army Strategic Defense Command

COMPUTER ENGINEERING RESEARCH LABORATORY

Georgia Institute of Technology

Atlanta, Georgia 30332 - 0540

Contract Data Requirements List Item A006

Period Covered: Not Applicable

Type Report: As Required

GEORGIA TECH GT-VSNI
VLSI DESIGN VERIFICATION DOCUMENT

May 23, 1990

Wei Siong Tan

COMPUTER ENGINEERING RESEARCH LABORATORY

Georgia Institute of Technology

Atlanta, Georgia 30332 - 0540

Eugene L. Sanders
USASDC
Contract Monitor

Cecil O. Alford
Georgia Tech
Project Director

GEORGIA TECH GT-VSNI

VLSI DESIGN VERIFICATION DOCUMENT

1.0 INTRODUCTION

There are eleven (11) Georgia Tech VLSI designs (see Table 1) in the AHAT Program. Each of these designs has been produced by Georgia Tech using the Genesil Silicon Compiler. Each design has passed the design verification process at Silicon Compiler Systems/Mentor Graphics and each has been fabricated in a bulk CMOS process (fabrication of certain chips was not complete when this document was released). Each of the Georgia Tech designs listed in Table 1 is being delivered to USASDC and to the Harris Corporation for conversion and fabrication in a rad-hard process. The program under which this work is done is AHAT (Advanced Hardened Avionics Technology). This document includes design information for the Georgia Tech serial network interface chip, GT-VSNI.

TABLE 1. GEORGIA TECH CHIP SET FOR AHAT

Design	DV PASSED	TAPE DELIV.	FABRICATED	TESTED
GT-VFPU	1/17/89	5/10/90	5/19/89	4/6/90
GT-VNUC				
GT-VTF				
GT-VTHR				
GT-VCLS	1/26/90			
GT-VCTR	2/8/90			
GT-VIAG				
GT-VDAG				
GT-VSNI	1/17/89	5/23/89	4/14/89	
GT-VSM8	1/17/89		5/6/89	4/18/89
GT-VSF	9/12/89			

1. Scheduled March 31, 1991
2. Scheduled December 31, 1990

Table of Contents

APPENDIX A
DESIGN VERIFICATION CHECKLIST

1. DV CONTROL NUMBER : _____ (Assigned by SCI)

2. CUSTOMER INFORMATION

Customer Name: Georgia Tech Chip Name: xserial (GT-VSNI/1)

Project Manager: Dr. C. O. Alford Phone: (404) 894-2533

Design Engineer: Wei Siong Tan Phone: (404) 894-2508

_____ Phone: _____

Test Engineer : Wei Siong Tan Phone: (404) 894-2508

3. SCI CONTACT: Girish Kumar

4. REGRESSION

4.1 Name of Session Log from recompile: build_all.session

4.2 Name of Simulation ~~and Timing~~ Command File: run all vectors.001

5. FUNCTIONAL INFORMATION (check when included)

5.1 Block Diagram : OK
5.2 Functional Description : OK
5.3 Timing Diagrams at Pins : OK
5.4 Annotated Views : OK Annotated Schematics: OK
5.5 Key Parameters : OK
5.6 Pin Description : OK Attach the _001.216 file.

6. PHYSICAL INFORMATION

6.1 Fabline : NSC-CN12A

6.2 Plots:
Chip Route (D size): OK Bonding Diagram (A size) : OK

6.3 Die Size: Reported Die Size: 300.91x272.17
Maximum Acceptable Die Size: 325x325
Minimum Acceptable Die Size: none

6.4 Genesil Package Name : CPGA120E
If nonstandard, package spec is included ____

6.5 Cavity/Well Size : 434 mils by 434 mils

6.6 Size of database: 40 Meg
Tape density: 6250 ___ 1600 ___ TK50 XXX

on

7. ELECTRICAL INFORMATION

7.1 Chip Frequency Proc_clk - 14.2 Meg.
Specified in netlist: 10 Meg. Target frequency: Net clk - 22.1 Meg.

7.2 Power Dissipation : Genesil 0.616 Watts Spec 0.616 Watts

7.3 Operating Voltage : from 4.5 Volts to 5.5 Volts

8. SIMULATION

8.1 Number of Clocking Regimes : 2

	Clock Pad Name	DIV/NO_DIV	Ext Clock Name	Int PHASE_A/PHASE_B Name
1.	Net_clk	no_div	Net_clk	PHASE_C/PHASE_D
2.	Proc_clk	no_div	Proc_clk	PHASE_A/PHASE_B
3.				
4.				
5.				

8.2 Simulation Setup file (Attach Listings):

Name: design_init.080

Description: Execute "design_init" prior to the execution of vector0.089, ... vector10.089. Execute "async setup" prior to the execution of vector11.089

Affected Tests:

Name:

Description:

Affected Tests:

Name:

Description:

Affected Tests:

Name:

8.3 Test Vector Set:

NOTE: Test vectors written one phase per vector have a maximum test frequency on the IMS Tester of 10 MHz.
Test vectors written one cycle per vector have a maximum test frequency on the IMS Tester of 20 MHz.

1. Name: run_all_vectors.001 No of vectors: 25,181
Generated using MASH: XXX traceobj: ____ other: ____
Timing Resolution: phase XX cycle XX other: ____
Description: vector0.089, ... vector10.089 have timing resolution of cycles. vector11.089 has timing resolution of phases.

Portions of Chip Tested: all (refer to chip document page 15 to 17)

Use for switch level simulation? Y N yes
Use for tester? Y N yes

2. Name: ____ No of vectors: ____
Generated using MASH: ____ traceobj: ____ other: ____
Timing Resolution: phase ____ cycle ____ other: ____
Description: ____

Portions of Chip Tested: ____

Use for switch level simulation? Y N
Use for tester? Y N

3. Name: ____ No of vectors: ____
Generated using MASH: ____ traceobj: ____ other: ____
Timing Resolution: phase ____ cycle ____ other: ____
Description: ____

Portions of Chip Tested: ____

Use for switch level simulation? Y N
Use for tester? Y N

4. Name: _____ No of vectors: _____
Generated using MASM: _____ traceobj: _____ other: _____
Timing Resolution: phase _____ cycle _____ other: _____
Description: _____
_____
_____

Portions of Chip Tested: _____
_____

Use for switch level simulation? Y N
Use for tester? Y N

5. Name: _____ No of vectors: _____
Generated using MASM: _____ traceobj: _____ other: _____
Timing Resolution: phase _____ cycle _____ other: _____
Description: _____
_____

Portions of Chip Tested: _____
_____

Use for switch level simulation? Y N
Use for tester? Y N

6. Name: _____ No of vectors: _____
Generated using MASM: _____ traceobj: _____ other: _____
Timing Resolution: phase _____ cycle _____ other: _____
Description: _____
Description: _____
_____
_____

Portions of Chip Tested: _____
_____

Use for switch level simulation? Y N
Use for tester? Y N

7. Name: _____ No of vectors: _____
Generated using MASM: _____ traceobj: _____ other: _____
Timing Resolution: phase _____ cycle _____ other: _____
Description: _____
_____
_____

Portions of Chip Tested: _____
_____

Use for switch level simulation? Y N
Use for tester? Y N

9. TIMING ANALYSIS

9.1 Environment

Temperature Coefficient: 35 Degree C / Watt (theta_JA)
Operating Temp : from 0 C (min) to 70 C (max)
Operating Voltage : from 4.5 V (min) to 5.5 V (max)

room junction temp = 25 + (theta_JA * Power) = 46.56 degrees C
maximum junction temp =
maximum ambient temp + (theta_JA * Power) = 91.56 degrees C

9.2 Include the following reports:

guaranteed model 5.0V (@47 C) room temp	guaranteed model min operating V (@ 4.5V) max junction temp (@ 92C)	target model min operating V max junction temp
Cycle: OK	Cycle: OK	Cycle:
Setup/Hold: OK	Setup/Hold: OK	Setup/Hold:
Output Delay: OK	Output Delay: OK	Output Delay:
Path Delay: OK	Path Delay: OK	Path Delay:

9.3 Setup Files:

Name:
Description :

Name:
Description :

Name:

Description :

Name:
Description :

9.4 Critical Boundary Conditions:

List critical paths here or annotate the timing report. Attach additional pages if needed.

Clocks

	Net clk report	Proc clk limit
1. Phase 1 High	20.7	24.2
2. Phase 2 High	22.1	41.7
3. Symmetric Cycle	44.1	70.2
4. Minimum Cycle	44.1	70.2

Outputs

	Signal Name	load (pF)	delay	limit
1.	all of the signals use default load			
2.	(see the attached timing report)			
3.				
4.				
5.				
6.				
7.				
8.				
9.				
10.				

Inputs

	Signal Name	setup	hold	limit
1.	(see the attached timing report)			
2.				
3.				
4.				
5.				
6.				
7.				
8.				
9.				
10.				

9.5 Hold Time Violations: none

10. DC CHARACTERISTICS - CMOS

PARAMETERS	DESCRIPTION	CONDITIONS 0 to 70	CONDITIONS -55 to +125	MIN	MAX
DATA PAD INPUT ONLY					
VIH	Input High Voltage			2.0V	
VIL	Input Low Voltage				0.8V
IIL	Input Leakage	VSS<Vin<VDD	VSS<Vin<VDD	-100uA	100uA
CIN	Input Capacitance				6.0pf
DATA PAD OUTPUT ONLY					
VOH	Output High Voltage	VDD= 4.5V IOH=-2.2	VDD= 4.5V IOH=-2mA	2.4V	
VOL	Output Low Voltage	VDD= 4.5V IOL= 6mA	VDD= 4.5V IOL= 5mA		0.4V
IOZ	Output Leakage current(high Z)	VSS<Vout<VDD	VSS<Vout<VDD	-100uA	100uA
COUT	Output Capacitance				7.0pf
DATA PAD INPUT/OUTPUT					
VOH	Output High Voltage	VDD= 4.5V IOH=-2.2	VDD= 4.5V IOH=-2mA	2.4V	
VOL	Output Low Voltage	VDD= 4.5V IOL= 6mA	VDD= 4.5V IOL= 5mA		0.4V
VIH	Input High Voltage			2.0V	
VIL	Input Low Voltage				0.8V
IOZ	Output leakage current (high Z)	VSS<Vout<VDD	VSS<Vout<VDD	-100uA	100uA
CIO	Input/Output Capacitance				7.0pf
CLOCK PAD					
VIH	Input High Voltage			3.9V	
VIL	Input Low Voltage				0.6V
IIL	Input Leakage	VSS<Vin<VDD	VSS<Vin<VDD	-100uA	100uA
CIN	Input Capacitance				15pf

NOTE: All parameters are measured at a supply voltage of VDD = 5V +/- 10% and a junction temperature of 125 C.

11. TAPEOUT AND TESTING SPECIFICATION

Prototype Brokerage Service Purchased? XXX yes _____ no
If yes: PO #will be provided at later date

12. CUSTOMER CHECKLIST COMMENTS

Pre-Verification Comments

We request that SCS inform us of the fault coverage of the test vectors we provided.

If the test coverage is low, we will provide additional test vectors.

The die size as it stands now causes design errors on the packaging.

This is not corrected because to do that would require trial and error (ad hoc) expansion of the chip size. The die size already exceeds the minimum die size requirement for the PGA120E package.

13. CUSTOMER CHECKLIST APPROVAL

The undersigned understands that if any design changes are initiated by the Customer subsequent to this sign-off, the Customer is liable for any charges imposed by Silicon Compilers as agreed to in either the Design Verification Terms & Conditions or the Prototype Brokerage Services Terms & Conditions.

Customer Approval : Martin Bueling Date 6/8/88

Title : FAE - Southeast Area

14. SCI CHECKLIST APPROVAL

Pre-Verification Comments

SCI Approval : _____ Date ___/___/___

Title : _____

11.2.1.3 CPGA100e

TYPE: 100 Lead Ceramic Pin-Grid Array

DIMENSIONS:

PACKAGE	w =	1.332 inch.
	l =	1.332 inch.
	h =	.134 inch.
CAVITY	w =	.433 inch.
	l =	.433 inch.

LEAD SPACING:	.100 inch.
MAXIMUM DIE SIZE:	.393 x .393 inch./side*
MINIMUM DIE SIZE:	.193 x .193 inch./side*
MAXIMUM BOND LENGTH:	.120 inch.*
MAXIMUM BOND ANGLE:	45 deg.*
TEMPERATURE COEFFICIENT:	35 deg. C/Watt

11.2.1.4 CPGA120e

TYPE: 120 Lead Ceramic Pin-Grid Array

DIMENSIONS:

PACKAGE	w =	1.332 inch.
	l =	1.332 inch.
	h =	.134 inch.
CAVITY	w =	.433 inch.
	l =	.433 inch.

LEAD SPACING:	.100 inch.
MAXIMUM DIE SIZE:	.393 x .393 inch./side*
MINIMUM DIE SIZE:	.193 x .193 inch./side*
MAXIMUM BOND LENGTH:	.120 inch.*
MAXIMUM BOND ANGLE:	45 deg.*
TEMPERATURE COEFFICIENT:	35 deg. C/Watt

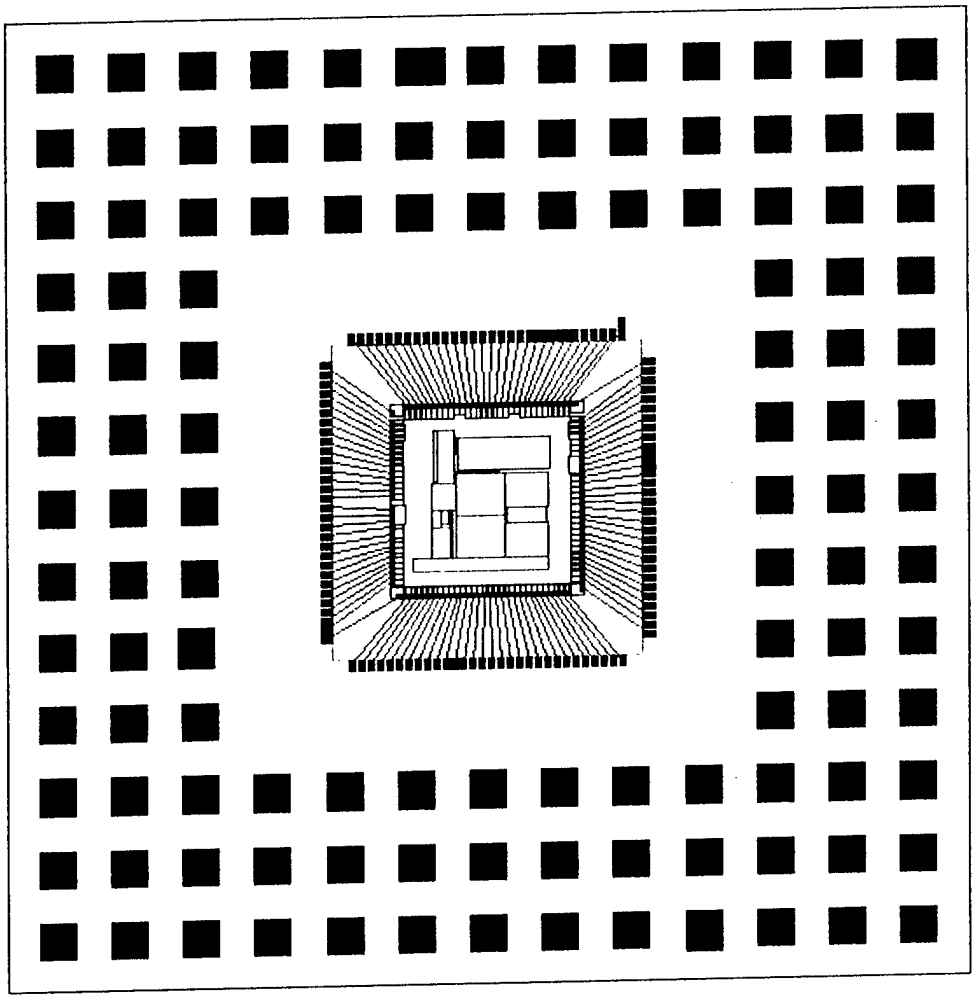

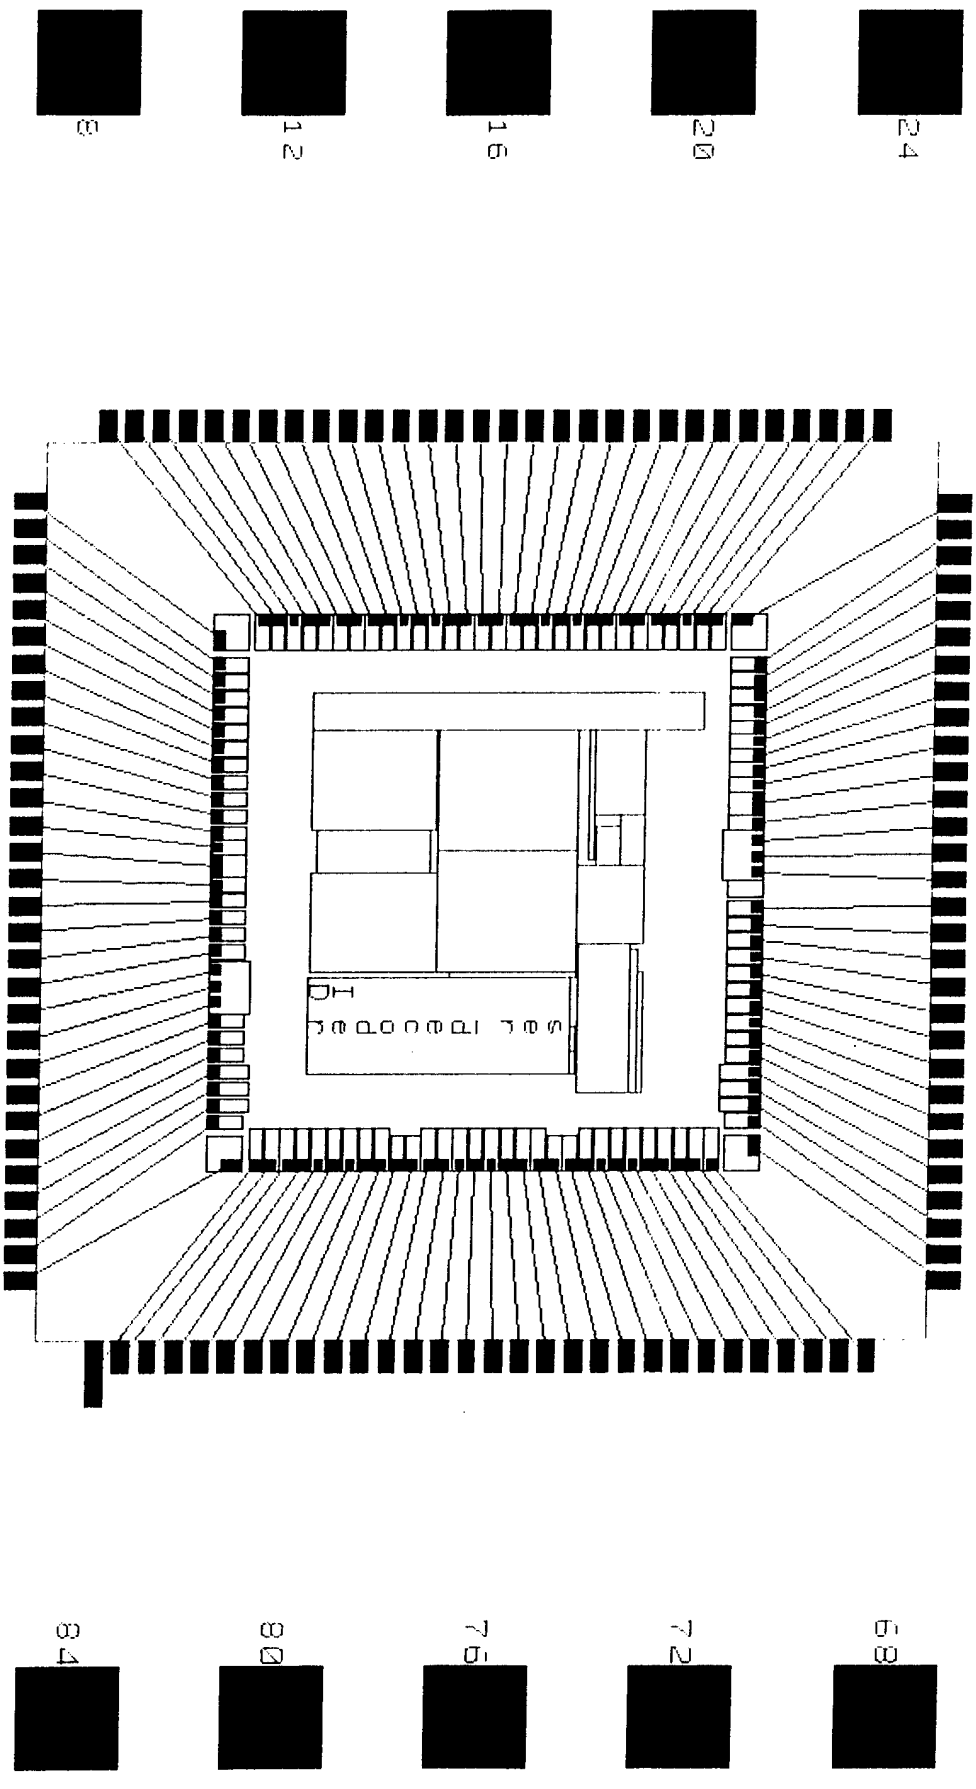

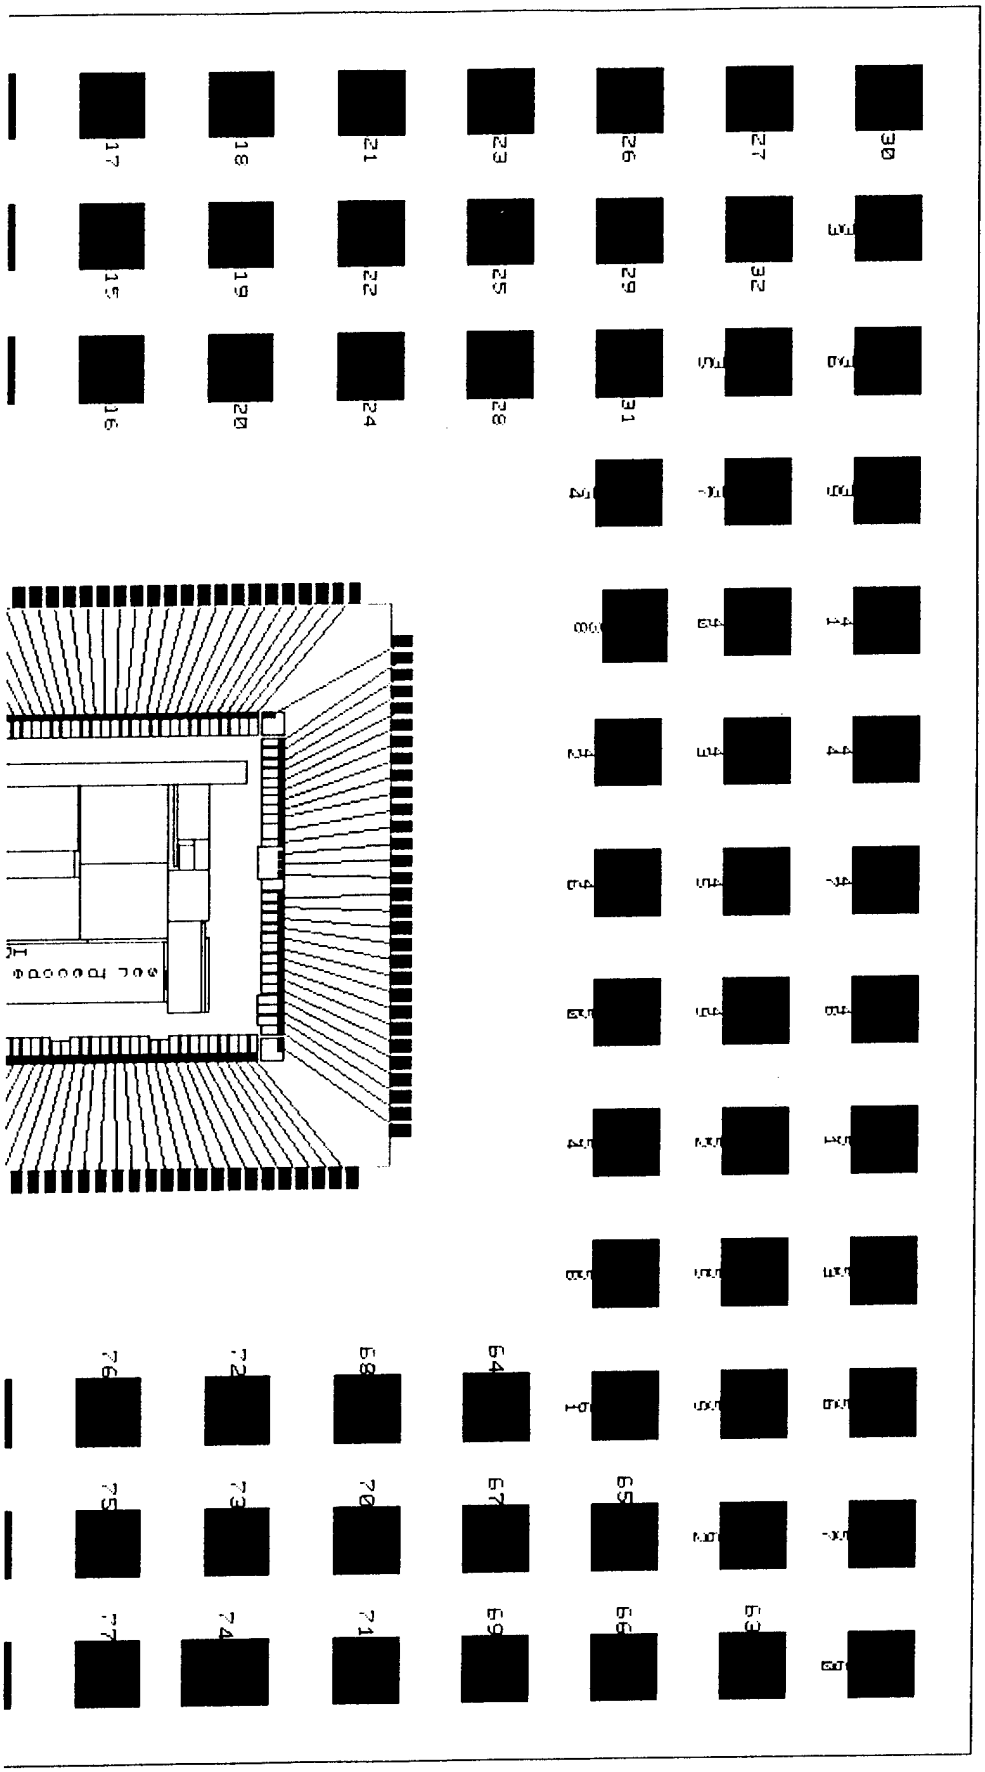

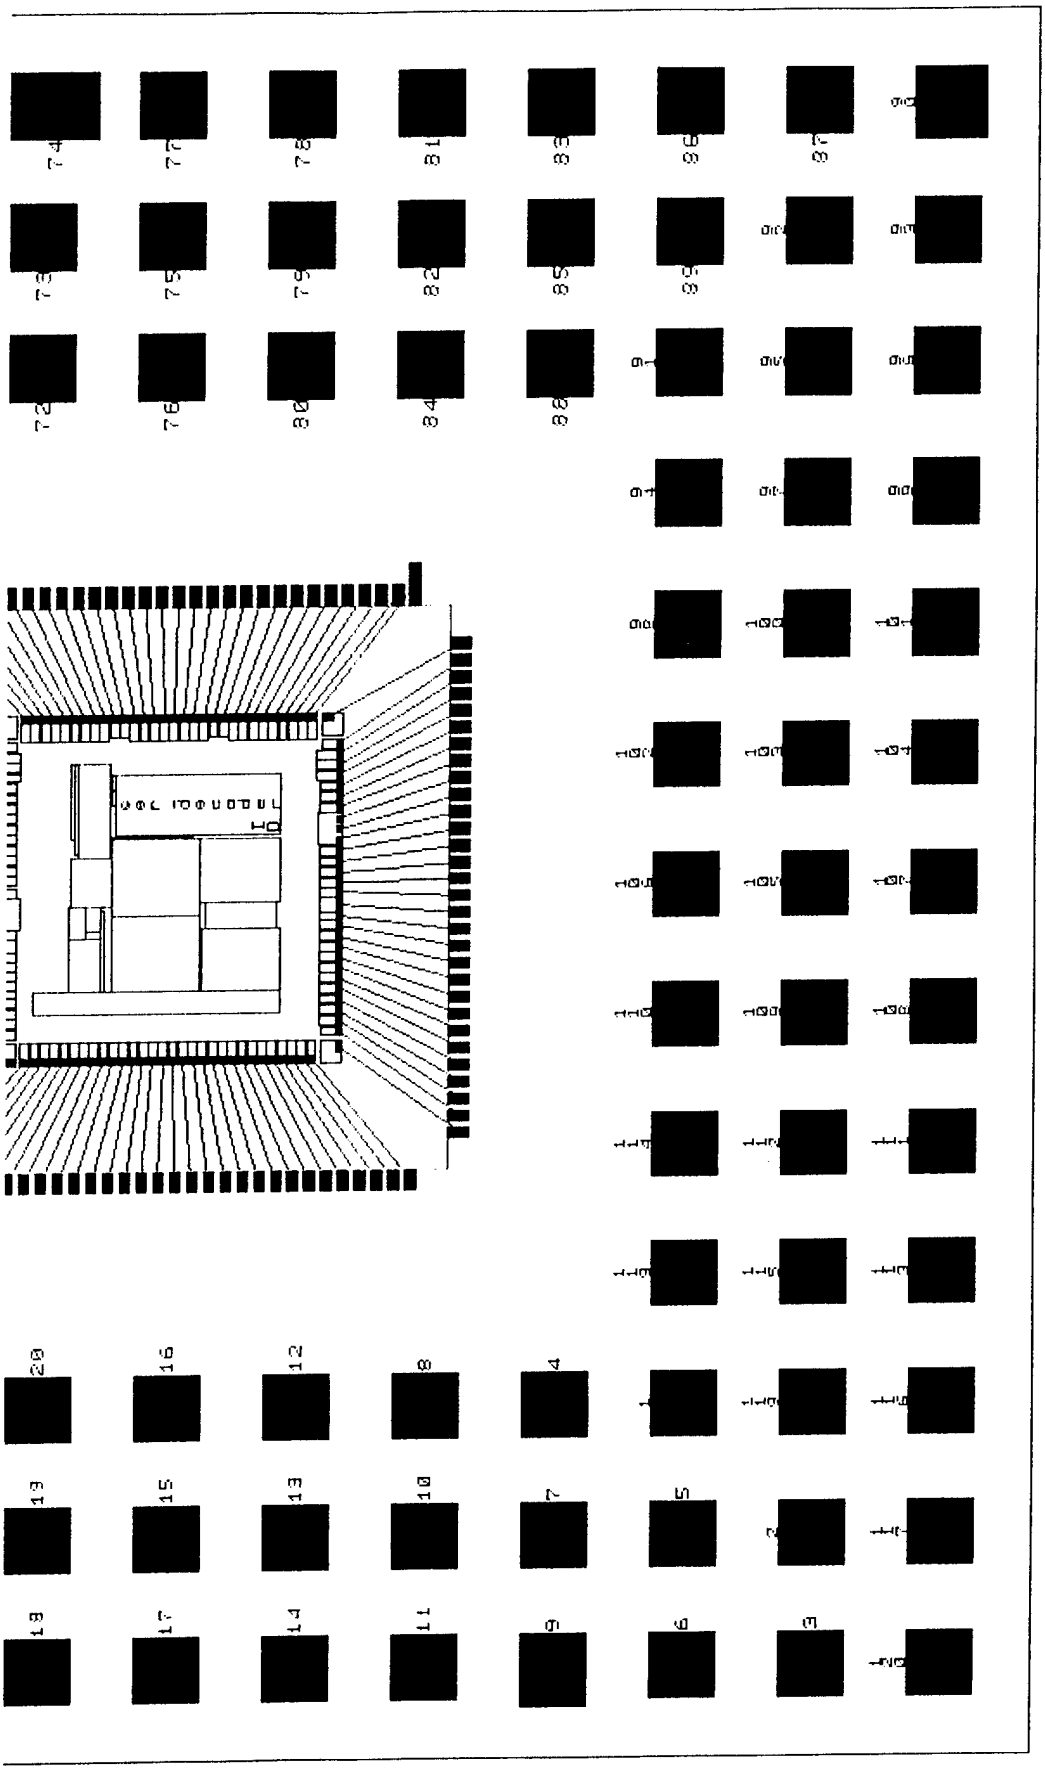

```
east {
   "Ra[3]" = 1
   "Ra[4]" = 2
   "Ra[5]" = 3
   "Ra[6]" = 4
   "Ra[7]" = 5
   "Rb[0]" = 6
   "Rb[1]" = 7
   "Rb[2]" = 8
   "Rb[3]" = 9
   "Ring_vss[1]" = 10
   "Ring_vdd[1]" = 11
   "Rb[4]" = 12
   "Rb[5]" = 13
   "Rb[6]" = 14
   "Rb[7]" = 15
   "Rc[0]" = 16
   "Rc[1]" = 17
   "Rc[2]" = 18
   "Rc[3]" = 19
   "Ring_vss[2]" = 20
   "Ring_vdd[2]" = 21
   "Rc[4]" = 22
   "Rc[5]" = 23
   "Rc[6]" = 24
   "Rc[7]" = 25
   "Rd[0]" = 26
   "Rd[1]" = 27
   "Rd[2]" = 28
   "Rd[3]" = 29
   "Rd[4]" = 30
   }
north
   {
   "Ring_vss[0]" = 32
   "Rd[5]" = 33
   "Rd[6]" = 34
   "Rd[7]" = 35
   "Data[0]" = 36
   "Data[1]" = 37
   "Data[2]" = 38
   "Data[3]" = 39
   "Ring_vss[3]" = 40
   "Ring_vdd[3]" = 41
   "Data[4]" = 42
   "Data[5]" = 43
   "Data[6]" = 44
   "Data[7]" = 45
   "Label" = 0
   "Proc_clk" = 46,47,48
   "N_xack" = 49
   "Core_vss" = 50
   "N_mem_write" = 51
   "N_mem_read" = 52
   "N_chip_select" = 53
   "Address[0]" = 54
```

```
   "Address[1]" = 55
   "Address[2]" = 56
   "R_eq_f_2"   = 57
   "F[0]" = 58
   "F[1]" = 59
   }
west
   {
   "F[2]" = 61
   "F[3]" = 62
   "F[4]" = 63
   "F[5]" = 64
   "F[6]" = 65
   "F[7]" = 66
   "F[8]" = 67
   "F[9]" = 68
   "F[10]" = 69
   "F[11]" = 70
   "F[12]" = 71
   "F[13]" = 72
   "F[14]" = 73
   "F[15]" = 74
   "F[16]" = 75
   "F[17]" = 76
   "F[18]" = 77
   "F[19]" = 78
   "F[20]" = 79
   "F[21]" = 80
   "F[22]" = 81
   "F[23]" = 82
   "F[24]" = 83
   "F[25]" = 84
   "F[26]" = 85
   "F[27]" = 86
   "F[28]" = 87
   "F[29]" = 88
   "F[30]" = 89
   "F[31]" = 90
   }
south
   {
   "Ring_vdd[4]" = 92
   "Host_dav" = 93
   "Host_rfi" = 94
   "Net_dav" = 95
   "Net_rfi" = 96
   "Net_error" = 97
   "IO_opcode[2]" = 98
   "IO_opcode[1]" = 99
   "IO_opcode[0]" = 100
   "R_bus_en[0]" = 101
   "R_bus_en[1]" = 102
   "Proc_run" = 103
   "Core_vdd" = 104
   "Net_run" = 105
   "Net_sync" = 106
```

```
"Transfer_out" = 107
"Transfer_in" = 108
"Serial_in" = 109
"Net_clk" = 110,111,112
"Dav" = 113
"Rfi" = 114
"Serial_out" = 115
"Ra[0]" = 116
"Ra[1]" = 117
"Ra[2]" = 118
"Ring_vdd[0]" =  119
}
```

```
pinout:
pad = "Corner_vss[0]" :
{
        location = (47201,-2726);
        orientation = R90;
        pinout = 120;
}
pad = "Ra[3]" :
{
        location = (47201,-1560);
        orientation = R90;
        pinout = 1;
}
pad = "Ra[4]" :
{
        location = (47201,-6);
        orientation = R90;
        pinout = 2;
}
pad = "Ra[5]" :
{
        location = (47201,1548);
        orientation = R90;
        pinout = 3;
}
pad = "Ra[6]" :
{
        location = (47201,3102);
        orientation = R90;
        pinout = 4;
}
pad = "Ra[7]" :
{
        location = (47201,4656);
        orientation = R90;
        pinout = 5;
}
pad = "Rb[0]" :
{
        location = (47201,6210);
        orientation = R90;
        pinout = 6;
}
pad = "Rb[1]" :
{
        location = (47201,7764);
        orientation = R90;
        pinout = 7;
}
pad = "Rb[2]" :
{
        location = (47201,9319);
        orientation = R90;
        pinout = 8;
}
pad = "Rb[3]" :
```

```
{
        location = (47201,10873);
        orientation = R90;
        pinout = 9;
}
pad = "Ring_vss[1]" :
{
        location = (47201,12427);
        orientation = R90;
        pinout = 10;
}
pad = "Ring_vdd[1]" :
{
        location = (47201,13981);
        orientation = R90;
        pinout = 11;
}
pad = "Rb[4]" :
{
        location = (47201,15535);
        orientation = R90;
        pinout = 12;
}
pad = "Rb[5]" :
{
        location = (47201,17089);
        orientation = R90;
        pinout = 13;
}
pad = "Rb[6]" :
{
        location = (47201,18643);
        orientation = R90;
        pinout = 14;
}
pad = "Rb[7]" :
{
        location = (47201,20197);
        orientation = R90;
        pinout = 15;
}
pad = "Rc[0]" :
{
        location = (47201,21752);
        orientation = R90;
        pinout = 16;
}
pad = "Rc[1]" :
{
        location = (47201,23306);
        orientation = R90;
        pinout = 17;
}
pad = "Rc[2]" :
{
        location = (47201,24860);
```

```
        orientation = R90;
        pinout = 18;
}
pad = "Rc[3]" :
{
        location = (47201,26414);
        orientation = R90;
        pinout = 19;
}
pad = "Ring_vss[2]" :
{
        location = (47201,27968);
        orientation = R90;
        pinout = 20;
}
pad = "Ring_vdd[2]" :
{
        location = (47201,29522);
        orientation = R90;
        pinout = 21;
}
pad = "Rc[4]" :
{
        location = (47201,31076);
        orientation = R90;
        pinout = 22;
}
pad = "Rc[5]" :
{
        location = (47201,32630);
        orientation = R90;
        pinout = 23;
}
pad = "Rc[6]" :
{
        location = (47201,34185);
        orientation = R90;
        pinout = 24;
}
pad = "Rc[7]" :
{
        location = (47201,35739);
        orientation = R90;
        pinout = 25;
}
pad = "Rd[0]" :
{
        location = (47201,37293);
        orientation = R90;
        pinout = 26;
}
pad = "Rd[1]" :
{
        location = (47201,38847);
        orientation = R90;
        pinout = 27;
```

```
}
pad = "Rd[2]" :
{
        location = (47201,40401);
        orientation = R90;
        pinout = 28;
}
pad = "Rd[3]" :
{
        location = (47201,41955);
        orientation = R90;
        pinout = 29;
}
pad = "Rd[4]" :
{
        location = (47201,43509);
        orientation = R90;
        pinout = 30;
}
pad = "Corner_vdd[0]" :
{
        location = (47201,45452);
        orientation = R180;
        pinout = 31;
}
pad = "Ring_vss[0]" :
{
        location = (45997,45452);
        orientation = R180;
        pinout = 32;
}
pad = "Rd[5]" :
{
        location = (44391,45452);
        orientation = R180;
        pinout = 33;
}
pad = "Rd[6]" :
{
        location = (42785,45452);
        orientation = R180;
        pinout = 34;
}
pad = "Rd[7]" :
{
        location = (41179,45452);
        orientation = R180;
        pinout = 35;
}
pad = "Data[0]" :
{
        location = (39573,45452);
        orientation = R180;
        pinout = 36;
}
pad = "Data[1]" :
```

```
{
        location = (37967,45452);
        orientation = R180;
        pinout = 37;
}
pad = "Data[2]" :
{
        location = (36361,45452);
        orientation = R180;
        pinout = 38;
}
pad = "Data[3]" :
{
        location = (34755,45452);
        orientation = R180;
        pinout = 39;
}
pad = "Ring_vss[3]" :
{
        location = (33149,45452);
        orientation = R180;
        pinout = 40;
}
pad = "Ring_vdd[3]" :
{
        location = (31543,45452);
        orientation = R180;
        pinout = 41;
}
pad = "Data[4]" :
{
        location = (29937,45452);
        orientation = R180;
        pinout = 42;
}
pad = "Data[5]" :
{
        location = (28331,45452);
        orientation = R180;
        pinout = 43;
}
pad = "Data[6]" :
{
        location = (26725,45452);
        orientation = R180;
        pinout = 44;
}
pad = "Data[7]" :
{
        location = (25119,45452);
        orientation = R180;
        pinout = 45;
}
pad = "Label" :
{
        location = (23513,45452);
```

```
        orientation = R180;
        pinout = NC;
}
pad = "Proc_clk" :
{
        location = (21908,45452);
        orientation = R180;
        pinout = 46,47,48;
}
pad = "N_xack" :
{
        location = (17090,45452);
        orientation = R180;
        pinout = 49;
}
pad = "Core_vss" :
{
        location = (15484,45452);
        orientation = R180;
        pinout = 50;
}
pad = "N_mem_write" :
{
        location = (13878,45452);
        orientation = R180;
        pinout = 51;
}
pad = "N_mem_read" :
{
        location = (12272,45452);
        orientation = R180;
        pinout = 52;
}
pad = "N_chip_select" :
{
        location = (10666,45452);
        orientation = R180;
        pinout = 53;
}
pad = "Address[0]" :
{
        location = (9060,45452);
        orientation = R180;
        pinout = 54;
}
pad = "Address[1]" :
{
        location = (7454,45452);
        orientation = R180;
        pinout = 55;
}
pad = "Address[2]" :
{
        location = (5848,45452);
        orientation = R180;
        pinout = 56;
```

```
}
pad = "R_eq_f_2" :
{
        location = (4242,45452);
        orientation = R180;
        pinout = 57;
}
pad = "F[0]" :
{
        location = (2636,45452);
        orientation = R180;
        pinout = 58;
}
pad = "F[1]" :
{
        location = (1030,45452);
        orientation = R180;
        pinout = 59;
}
pad = "Corner_vdd[1]" :
{
        location = (-977,45452);
        orientation = R270;
        pinout = 60;
}
pad = "F[2]" :
{
        location = (-977,44286);
        orientation = R270;
        pinout = 61;
}
pad = "F[3]" :
{
        location = (-977,42732);
        orientation = R270;
        pinout = 62;
}
pad = "F[4]" :
{
        location = (-977,41178);
        orientation = R270;
        pinout = 63;
}
pad = "F[5]" :
{
        location = (-977,39624);
        orientation = R270;
        pinout = 64;
}
pad = "F[6]" :
{
        location = (-977,38070);
        orientation = R270;
        pinout = 65;
}
pad = "F[7]" :
```

```
{
        location = (-977,36516);
        orientation = R270;
        pinout = 66;
}
pad = "F[8]" :
{
        location = (-977,34962);
        orientation = R270;
        pinout = 67;
}
pad = "F[9]" :
{
        location = (-977,33408);
        orientation = R270;
        pinout = 68;
}
pad = "F[10]" :
{
        location = (-977,31853);
        orientation = R270;
        pinout = 69;
}
pad = "F[11]" :
{
        location = (-977,30299);
        orientation = R270;
        pinout = 70;
}
pad = "F[12]" :
{
        location = (-977,28745);
        orientation = R270;
        pinout = 71;
}
pad = "F[13]" :
{
        location = (-977,27191);
        orientation = R270;
        pinout = 72;
}
pad = "F[14]" :
{
        location = (-977,25637);
        orientation = R270;
        pinout = 73;
}
pad = "F[15]" :
{
        location = (-977,24083);
        orientation = R270;
        pinout = 74;
}
pad = "F[16]" :
{
        location = (-977,22529);
```

```
        orientation = R270;
        pinout = 75;
}
pad = "F[17]" :
{
        location = (-977,20974);
        orientation = R270;
        pinout = 76;
}
pad = "F[18]" :
{
        location = (-977,19420);
        orientation = R270;
        pinout = 77;
}
pad = "F[19]" :
{
        location = (-977,17866);
        orientation = R270;
        pinout = 78;
}
pad = "F[20]" :
{
        location = (-977,16312);
        orientation = R270;
        pinout = 79;
}
pad = "F[21]" :
{
        location = (-977,14758);
        orientation = R270;
        pinout = 80;
}
pad = "F[22]" :
{
        location = (-977,13204);
        orientation = R270;
        pinout = 81;
}
pad = "F[23]" :
{
        location = (-977,11650);
        orientation = R270;
        pinout = 82;
}
pad = "F[24]" :
{
        location = (-977,10096);
        orientation = R270;
        pinout = 83;
}
pad = "F[25]" :
{
        location = (-977,8541);
        orientation = R270;
        pinout = 84;
```

```
}
pad = "F[26]" :
{
        location = (-977,6987);
        orientation = R270;
        pinout = 85;
}
pad = "F[27]" :
{
        location = (-977,5433);
        orientation = R270;
        pinout = 86;
}
pad = "F[28]" :
{
        location = (-977,3879);
        orientation = R270;
        pinout = 87;
}
pad = "F[29]" :
{
        location = (-977,2325);
        orientation = R270;
        pinout = 88;
}
pad = "F[30]" :
{
        location = (-977,771);
        orientation = R270;
        pinout = 89;
}
pad = "F[31]" :
{
        location = (-977,-783);
        orientation = R270;
        pinout = 90;
}
pad = "Corner_vss[1]" :
{
        location = (-977,-2726);
        orientation = ID;
        pinout = 91;
}
pad = "Ring_vdd[4]" :
{
        location = (269,-2726);
        orientation = ID;
        pinout = 92;
}
pad = "Host_dav" :
{
        location = (1930,-2726);
        orientation = ID;
        pinout = 93;
}
pad = "Host_rfi" :
```

```
{
        location = (3592,-2726);
        orientation = ID;
        pinout = 94;
}
pad = "Net_dav" :
{
        location = (5253,-2726);
        orientation = ID;
        pinout = 95;
}
pad = "Net_rfi" :
{
        location = (6914,-2726);
        orientation = ID;
        pinout = 96;
}
pad = "Net_error" :
{
        location = (8576,-2726);
        orientation = ID;
        pinout = 97;
}
pad = "IO_opcode[2]" :
{
        location = (10237,-2726);
        orientation = ID;
        pinout = 98;
}
pad = "IO_opcode[1]" :
{
        location = (11898,-2726);
        orientation = ID;
        pinout = 99;
}
pad = "IO_opcode[0]" :
{
        location = (13559,-2726);
        orientation = ID;
        pinout = 100;
}
pad = "R_bus_en[0]" :
{
        location = (15221,-2726);
        orientation = ID;
        pinout = 101;
}
pad = "R_bus_en[1]" :
{
        location = (16882,-2726);
        orientation = ID;
        pinout = 102;
}
pad = "Proc_run" :
{
        location = (18543,-2726);
```

```
        orientation = ID;
        pinout = 103;
}
pad = "Core_vdd" :
{
        location = (20205,-2726);
        orientation = ID;
        pinout = 104;
}
pad = "Net_run" :
{
        location = (21866,-2726);
        orientation = ID;
        pinout = 105;
}
pad = "Net_sync" :
{
        location = (23527,-2726);
        orientation = ID;
        pinout = 106;
}
pad = "Transfer_out" :
{
        location = (25189,-2726);
        orientation = ID;
        pinout = 107;
}
pad = "Transfer_in" :
{
        location = (26850,-2726);
        orientation = ID;
        pinout = 108;
}
pad = "Serial_in" :
{
        location = (28511,-2726);
        orientation = ID;
        pinout = 109;
}
pad = "Net_clk" :
{
        location = (30173,-2726);
        orientation = ID;
        pinout = 110,111,112;
}
pad = "Dav" :
{
        location = (35156,-2726);
        orientation = ID;
        pinout = 113;
}
pad = "Rfi" :
{
        location = (36818,-2726);
        orientation = ID;
        pinout = 114;
```

```
}
pad = "Serial_out" :
{
        location = (38479,-2726);
        orientation = ID;
        pinout = 115;
}
pad = "Ra[0]" :
{
        location = (40140,-2726);
        orientation = ID;
        pinout = 116;
}
pad = "Ra[1]" :
{
        location = (41802,-2726);
        orientation = ID;
        pinout = 117;
}
pad = "Ra[2]" :
{
        location = (43463,-2726);
        orientation = ID;
        pinout = 118;
}
pad = "Ring_vdd[0]" :
{
        location = (45124,-2726);
        orientation = ID;
        pinout = 119;
}
end_pinout;
```

****

Genesil Screen Dump -- Wed Jun 8 17:10:29 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

SETUP AND HOLD MODE

Fabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:47 deg C Voltage:5.00v

External Clock: Proc_clk

Included setup files:

#0 nom_phase_a (nominal op. cond. for Proc_clk)

INPUT SETUP AND HOLD TIMES (ns)

Input	Setup Time Ph1(f)	Setup Time Ph2(f)	Hold Time Ph1(f)	Hold Time Ph2(f)	
Address[0]	---	8.8	---	-5.4	PATH
Address[1]	---	9.0	---	-5.6	PATH
Address[2]	---	8.8	---	-5.5	PATH
Data[0]	---	6.0	---	-2.5	PATH
Data[1]	---	6.1	---	-2.6	PATH
Data[2]	---	5.9	---	-2.5	PATH
Data[3]	---	5.9	---	-2.5	PATH
Data[4]	---	7.2	---	-3.8	PATH
Data[5]	---	7.1	---	-3.7	PATH
Data[6]	---	7.0	---	-3.6	PATH
Data[7]	---	6.8	---	-3.5	PATH
F[0]	---	0.4	---	1.0	PATH
F[10]	---	0.3	---	1.1	PATH
F[11]	---	0.3	---	1.1	PATH
F[12]	---	0.3	---	1.1	PATH
F[13]	---	0.3	---	1.1	PATH
F[14]	---	0.3	---	1.1	PATH
F[15]	---	0.3	---	1.1	PATH
F[16]	---	0.3	---	1.1	PATH
F[17]	---	0.3	---	1.1	PATH
F[18]	---	0.3	---	1.2	PATH
F[19]	---	0.3	---	1.2	PATH
F[1]	---	0.4	---	1.0	PATH
F[20]	---	0.3	---	1.2	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

****

Genesil Screen Dump -- Wed Jun 8 17:10:40 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

Genesil Version v7.0_Beta

F[20]	---	0.3	---	1.2	PATH
F[21]	---	0.3	---	1.2	PATH
F[22]	---	0.3	---	1.2	PATH
F[23]	---	0.2	---	1.2	PATH
F[24]	---	0.2	---	1.2	PATH
F[25]	---	0.2	---	1.2	PATH
F[26]	---	0.2	---	1.2	PATH
F[27]	---	0.2	---	1.2	PATH
F[28]	---	0.2	---	1.2	PATH
F[29]	---	0.2	---	1.2	PATH
F[2]	---	0.4	---	1.1	PATH
F[30]	---	0.2	---	1.2	PATH
F[31]	---	0.2	---	1.2	PATH
F[3]	---	0.4	---	1.1	PATH
F[4]	---	0.3	---	1.1	PATH
F[5]	---	0.3	---	1.1	PATH
F[6]	---	0.3	---	1.1	PATH
F[7]	---	0.3	---	1.1	PATH
F[8]	---	0.3	---	1.1	PATH
F[9]	---	0.3	---	1.1	PATH
IO_opcode[0]	---	24.0	---	-7.3	PATH
IO_opcode[1]	---	22.7	---	-7.4	PATH
IO_opcode[2]	---	24.2	---	-8.3	PATH
N_chip_select	---	8.2	---	-4.9	PATH
N_mem_read	---	5.6	---	-2.2	PATH
N_mem_write	---	7.0	---	-3.6	PATH
et_run	---	4.5	---	-1.2	PATH
et_sync	---	---	---	---	PATH
R[0]	---	0.3	---	1.3	PATH
R[10]	---	0.4	---	1.3	PATH
[11]	---	0.4	---	1.3	PATH
R[12]	---	0.4	---	1.2	PATH
R[13]	---	0.4	---	1.2	PATH
[14]	---	0.4	---	1.2	PATH
[15]	---	0.4	---	1.2	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

Jun 9 14:42 1988 timing_at_47C_5V Page 4

****

Genesil Screen Dump -- Wed Jun 8 17:10:50 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

Genesil Version v7.0_Beta

R[12]	---	0.4	---	1.2	PATH
R[13]	---	0.4	---	1.2	PATH
R[14]	---	0.4	---	1.2	PATH
R[15]	---	0.4	---	1.2	PATH
R[16]	---	0.4	---	1.2	PATH
R[17]	---	0.5	---	1.2	PATH
R[18]	---	0.5	---	1.2	PATH
R[19]	---	0.5	---	1.2	PATH
R[1]	---	0.3	---	1.3	PATH
R[20]	---	0.5	---	1.1	PATH
R[21]	---	0.6	---	1.1	PATH
R[22]	---	0.6	---	1.0	PATH
R[23]	---	0.6	---	1.0	PATH
R[24]	---	0.7	---	1.0	PATH
R[25]	---	0.7	---	1.0	PATH
R[26]	---	0.7	---	1.0	PATH
R[27]	---	0.7	---	0.9	PATH
R[28]	---	0.7	---	0.9	PATH
R[29]	---	0.7	---	0.9	PATH
R[2]	---	0.3	---	1.3	PATH
R[30]	---	0.8	---	0.9	PATH
R[31]	---	0.8	---	0.9	PATH
R[3]	---	0.3	---	1.3	PATH
R[4]	---	0.4	---	1.3	PATH
R[5]	---	0.4	---	1.3	PATH
R[6]	---	0.4	---	1.3	PATH
R[7]	---	0.4	---	1.3	PATH
R[8]	---	0.4	---	1.3	PATH
R[9]	---	0.4	---	1.3	PATH
R_bus_en[0]	---	16.8	---	-13.4	PATH
R_bus_en[1]	---	17.4	---	-14.1	PATH
R_eq_f_2	---	0.4	---	1.0	PATH
Serial_in	---	---	---	---	PATH
Transfer_in	---	---	---	---	PATH
Transfer_out	---	---	---	---	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

****

Genesil Screen Dump -- Wed Jun 8 17:11:08 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

CLOCK REPORT MODE

Fabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:47 deg C Voltage:5.00v

External Clock: Proc_clk

Included setup files:

#0 nom_phase_a (nominal op. cond. for Proc_clk)

CLOCK TIMES (minimum)

Phase 1 High:	20.8 ns	Phase 2 High:	24.2 ns
Cycle (from Ph1):	41.7 ns	Cycle (from Ph2):	70.2 ns
Minimum Cycle Time:	70.2 ns	Symmetric Cycle Time:	70.2 ns

CLOCK WORST CASE PATHS

Minimum Phase 1 high time is 20.8 ns set by:

** Clock delay: 1.8ns (22.6-20.8)

Node	Cumulative Delay	Transition
host_data_latch/(internal)	22.6	rise
host_data_latch/wr[1]	21.0	fall
host_data_latch/wr[1]'	20.8	fall
host_data_latch/dec_en	19.6	fall
host_data_latch/host_proc_mwtc	18.0	fall
<oc_sync/stage2/host_proc_mwtc	16.6	fall
<c_sync/stage2/host_proc_mwtc'	7.1	fall
<st_proc_sync/stage2/n_cs_sync	6.2	rise
host_proc_sync/stage2/cs_sync	5.4	fall
host_proc_sync/stage1/cs_sync	5.3	fall
host_proc_sync/stage1/cs_sync'	5.0	fall
host_proc_sync/stage1/PHASE_A	2.2	rise
Proc_clk/PHASE_A	1.2	rise
Proc_clk	0.0	rise

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PHASE1_HIGH CYCLE_PH1 DUMP_LATCH_THRESHOLD

PHASE2_HIGH CYCLE_PH2 DUMP_LATCH

>TIMING>CLOCKS>

****

Genesil Screen Dump -- Wed Jun 8 17:11:16 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

Proc_clk 0.0 rise

Minimum Phase 2 high time is 24.2 ns set by:

** Clock delay: 3.8ns (28.0-24.2)

Node	Cumulative Delay	Transition
Rd[5]/(internal)	28.0	rise
R[29]	23.7	fall
Rd[5]/r	17.4	fall
proc_out_mux/r[29]	16.4	fall
proc_out_mux/r[29]'	12.2	fall
proc_out_mux/net_read	9.7	rise
opcode_decoder/net_read	9.3	rise
opcode_decoder/net_read'	8.6	rise
opcode_decoder/n_io_opcode[2]	7.6	rise
opcode_decoder/n_io_opcode[2]'	7.5	rise
opcode_decoder/io_opcode[2]	6.2	fall
IO_opcode[2]/io_opcode	4.6	fall
IO_opcode[2]/io_opcode'	3.5	fall
IO_opcode[2]	0.0	fall

Minimum cycle time (from Ph1) is 41.7 ns set by:

** Clock delay: 2.1ns (43.8-41.7)

Node	Cumulative Delay	Transition
proc_host_fifo/(internal)	43.8	fall
proc_host_fifo/r[29]	43.5	rise
proc_in_mux/proc_din[29]	42.9	rise
proc_in_mux/proc_din[29]'	39.5	rise
proc_in_mux/r_in[29]	38.2	rise
Rd[5]/r_in	37.7	rise
Rd[5]/r_in'	37.6	rise
*Rd[5]/(internal)	36.1	fall
R[29]	33.4	rise
Rd[5]/r	27.8	rise

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PHASE1_HIGH CYCLE_PH1 DUMP_LATCH_THRESHOLD
PHASE2_HIGH CYCLE_PH2 DUMP_LATCH

>TIMING>CLOCKS>

```
**********************************************************************************
                Genesil Screen Dump -- Wed Jun  8 17:11:25 1988

**********************************************************************************
Chip: ~sni/sni/xserial                                              Timing Analyzer
---------------------------Genesil Version v7.0_Beta----------------------------
   Rd[5]/r                                27.8                  rise
   proc_out_mux/r[29]                     26.8                  rise
   proc_out_mux/r[29]'                    23.4                  rise
   proc_out_mux/net_proc_do[29]           22.1                  rise
   net_proc_fifo/net_proc_do[29]          21.8                  rise
   net_proc_fifo/net_proc_do[29]'         21.8                  rise
   net_proc_fifo/PHASE_A                   2.2                  rise
   Proc_clk/PHASE_A                        1.2                  rise
   Proc_clk                                0.0                  rise

Minimum cycle time (from Ph2) is   70.2    ns set by:
                                  ----------
 ** Clock delay: 2.1ns (37.2-35.1) cycle_sharing disabled
   Node                              Cumulative Delay      Transition
   Data[2]                                59.3                 fall
   Data[2]/host_dout                      53.6                 fall
   <eceiver/8to1_mux/host_dout[2]         53.3                 fall
   <ceiver/8to1_mux/host_dout[2]'         51.1                 fall
   <ver/8to1_mux/proc_host_do[10]         46.8                 fall
   <eceiver/latch/ph_do_latch[10]         46.8                 fall
   <ceiver/latch/ph_do_latch[10]'         46.6                 fall
   <ceiver/latch/proc_host_do[10]         43.1                 fall
   <oc_host_fifo/proc_host_do[10]         42.8                 fall
   <c_host_fifo/proc_host_do[10]'         42.0                 fall
   *proc_host_fifo/(internal)             35.9                 rise
   proc_host_fifo/r[10]                   35.5                 fall
   proc_in_mux/proc_din[10]               35.3                 fall
   proc_in_mux/proc_din[10]'              31.9                 fall
   proc_in_mux/r_in[10]                   30.4                 fall
   Rb[2]/r_in                             29.2                 fall
   Rb[2]/r_in'                            28.3                 fall
   R[10]                                  23.7                 fall
   Rb[2]/r                                17.4                 fall
   proc_out_mux/r[10]                     16.4                 fall
   proc_out_mux/r[10]'                    12.2                 fall
----------------------------------------------------------------------------------
INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
----------------------------------------------------------------------------------
BACK            PHASE1_HIGH     CYCLE_PH1       DUMP_LATCH_THRESHOLD
                PHASE2_HIGH     CYCLE_PH2       DUMP_LATCH


----------------------------------------------------------------------------------


>TIMING>CLOCKS>
```

****

Genesil Screen Dump -- Wed Jun 8 17:11:30 1988

****

hip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

Minimum cycle time (from Ph2) is 70.2 ns set by:

** Clock delay: 2.1ns (37.2-35.1) cycle_sharing disabled

Node	Cumulative Delay	Transition
Data[2]	59.3	fall
Data[2]/host_dout	53.6	fall
<eceiver/8to1_mux/host_dout[2]	53.3	fall
<ceiver/8to1_mux/host_dout[2]'	51.1	fall
<ver/8to1_mux/proc_host_do[10]	46.8	fall
<eceiver/latch/ph_do_latch[10]	46.8	fall
<ceiver/latch/ph_do_latch[10]'	46.6	fall
<ceiver/latch/proc_host_do[10]	43.1	fall
<oc_host_fifo/proc_host_do[10]	42.8	fall
<c_host_fifo/proc_host_do[10]'	42.0	fall
*proc_host_fifo/(internal)	35.9	rise
proc_host_fifo/r[10]	35.5	fall
proc_in_mux/proc_din[10]	35.3	fall
proc_in_mux/proc_din[10]'	31.9	fall
proc_in_mux/r_in[10]	30.4	fall
Rb[2]/r_in	29.2	fall
Rb[2]/r_in'	28.3	fall
R[10]	23.7	fall
Rb[2]/r	17.4	fall
proc_out_mux/r[10]	16.4	fall
proc_out_mux/r[10]'	12.2	fall
proc_out_mux/net_read	9.7	rise
opcode_decoder/net_read	9.3	rise
opcode_decoder/net_read'	8.6	rise
opcode_decoder/n_io_opcode[2]	7.6	rise
opcode_decoder/n_io_opcode[2]'	7.5	rise
opcode_decoder/io_opcode[2]	6.2	fall
IO_opcode[2]/io_opcode	4.6	fall
IO_opcode[2]/io_opcode'	3.5	fall
IO_opcode[2]	0.0	fall

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PHASE1_HIGH CYCLE_PH1 DUMP_LATCH_THRESHOLD
PHASE2_HIGH CYCLE_PH2 DUMP_LATCH

>TIMING>CLOCKS>

****

Genesil Screen Dump -- Wed Jun 8 17:11:50 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

OUTPUT DELAY MODE

Tabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:47 deg C Voltage:5.00v

External Clock: Proc_clk

Included setup files:

#0 nom_phase_a (nominal op. cond. for Proc_clk)

	OUTPUT DELAYS (ns)					
Output	Ph1(r) Delay		Ph2(r) Delay		Loading(pf)	
	Min	Max	Min	Max		
Data[0]	0.0	25.8	0.0	24.2	50.00	PATH
Data[1]	0.0	25.8	0.0	24.2	50.00	PATH
Data[2]	0.0	25.8	0.0	24.2	50.00	PATH
Data[3]	0.0	25.9	0.0	24.2	50.00	PATH
Data[4]	0.0	25.9	0.0	24.1	50.00	PATH
Data[5]	0.0	25.8	0.0	24.0	50.00	PATH
Data[6]	0.0	26.1	0.0	24.3	50.00	PATH
Data[7]	0.0	26.3	0.0	24.7	50.00	PATH
Dav	---	---	---	---	50.00	PATH
Host_dav	12.6	13.8	---	---	50.00	PATH
Host_rfi	16.1	18.8	---	---	50.00	PATH
Net_xack	12.9	18.2	15.0	18.2	50.00	PATH
Net_dav	12.7	13.9	---	---	50.00	PATH
Net_error	13.5	28.1	---	---	50.00	PATH
Net_rfi	14.8	28.0	---	---	50.00	PATH
Proc_run	11.9	14.3	---	---	50.00	PATH
R[0]	0.0	30.4	0.0	21.6	50.00	PATH
R[10]	0.0	33.2	0.0	23.7	50.00	PATH
R[11]	0.0	32.0	0.0	22.3	50.00	PATH
R[12]	0.0	31.6	0.0	21.8	50.00	PATH
R[13]	0.0	31.5	0.0	21.7	50.00	PATH
R[14]	0.0	31.4	0.0	21.5	50.00	PATH
R[15]	0.0	31.3	0.0	21.4	50.00	PATH
R[16]	0.0	30.2	0.0	21.2	50.00	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>OUTPUT DELAY>

****

Genesil Screen Dump -- Wed Jun 8 17:11:59 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

Genesil Version v7.0_Beta

Proc_run	11.9	14.3	---	---	50.00	PATH
R[0]	0.0	30.4	0.0	21.6	50.00	PATH
R[10]	0.0	33.2	0.0	23.7	50.00	PATH
R[11]	0.0	32.0	0.0	22.3	50.00	PATH
R[12]	0.0	31.6	0.0	21.8	50.00	PATH
R[13]	0.0	31.5	0.0	21.7	50.00	PATH
R[14]	0.0	31.4	0.0	21.5	50.00	PATH
R[15]	0.0	31.3	0.0	21.4	50.00	PATH
R[16]	0.0	30.2	0.0	21.2	50.00	PATH
R[17]	0.0	30.1	0.0	21.1	50.00	PATH
R[18]	0.0	30.0	0.0	20.9	50.00	PATH
R[19]	0.0	29.9	0.0	20.8	50.00	PATH
R[1]	0.0	30.6	0.0	21.8	50.00	PATH
R[20]	0.0	30.0	0.0	20.9	50.00	PATH
R[21]	0.0	30.2	0.0	21.1	50.00	PATH
R[22]	0.0	30.3	0.0	21.2	50.00	PATH
R[23]	0.0	30.3	0.0	21.2	50.00	PATH
R[24]	0.0	30.4	0.0	21.3	50.00	PATH
R[25]	0.0	30.5	0.0	21.4	50.00	PATH
R[26]	0.0	30.6	0.0	21.6	50.00	PATH
R[27]	0.0	31.7	0.0	21.7	50.00	PATH
R[28]	0.0	31.8	0.0	21.9	50.00	PATH
R[29]	0.0	33.4	0.0	23.7	50.00	PATH
R[2]	0.0	30.8	0.0	22.0	50.00	PATH
R[30]	0.0	32.8	0.0	23.1	50.00	PATH
R[31]	0.0	32.6	0.0	22.8	50.00	PATH
R[3]	0.0	31.2	0.0	22.4	50.00	PATH
R[4]	0.0	31.3	0.0	22.6	50.00	PATH
R[5]	0.0	32.4	0.0	22.7	50.00	PATH
R[6]	0.0	32.5	0.0	22.9	50.00	PATH
R[7]	0.0	32.7	0.0	23.1	50.00	PATH
R[8]	0.0	32.8	0.0	23.3	50.00	PATH
R[9]	0.0	33.1	0.0	23.5	50.00	PATH
fi	---	---	---	---	50.00	PATH
Serial_out	---	---	---	---	50.00	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>OUTPUT DELAY>

****

Genesil Screen Dump -- Thu Jun 9 07:52:49 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

SETUP AND HOLD MODE

Tabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:47 deg C Voltage:5.00v

External Clock: Net_clk

Included setup files:

#0 nom_phase_c (nominal op. cond. for Net_clk)

INPUT SETUP AND HOLD TIMES (ns)

Input	Setup Time Ph1(f)	Setup Time Ph2(f)	Hold Time Ph1(f)	Hold Time Ph2(f)	
Address[0]	---	7.4	---	-4.1	PATH
Address[1]	---	7.5	---	-4.2	PATH
Address[2]	---	7.5	---	-4.1	PATH
Data[0]	---	5.0	---	-3.2	PATH
Data[1]	---	5.1	---	-3.2	PATH
Data[2]	---	5.0	---	-3.2	PATH
Data[3]	---	5.1	---	-3.2	PATH
Data[4]	---	5.7	---	-4.0	PATH
Data[5]	---	5.7	---	-4.0	PATH
Data[6]	---	5.7	---	-4.0	PATH
Data[7]	---	5.7	---	-4.0	PATH
F[0]	---	---	---	---	PATH
F[10]	---	---	---	---	PATH
F[11]	---	---	---	---	PATH
F[12]	---	---	---	---	PATH
F[13]	---	---	---	---	PATH
F[14]	---	---	---	---	PATH
F[15]	---	---	---	---	PATH
F[16]	---	---	---	---	PATH
F[17]	---	---	---	---	PATH
F[18]	---	---	---	---	PATH
F[19]	---	---	---	---	PATH
F[1]	---	---	---	---	PATH
F[20]	---	---	---	---	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

****

Genesil Screen Dump -- Thu Jun 9 07:53:01 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

Genesil Version v7.0_Beta

F[20]	---	---	---	---	PATH
F[21]	---	---	---	---	PATH
F[22]	---	---	---	---	PATH
F[23]	---	---	---	---	PATH
F[24]	---	---	---	---	PATH
F[25]	---	---	---	---	PATH
F[26]	---	---	---	---	PATH
F[27]	---	---	---	---	PATH
F[28]	---	---	---	---	PATH
F[29]	---	---	---	---	PATH
F[2]	---	---	---	---	PATH
F[30]	---	---	---	---	PATH
F[31]	---	---	---	---	PATH
F[3]	---	---	---	---	PATH
F[4]	---	---	---	---	PATH
F[5]	---	---	---	---	PATH
F[6]	---	---	---	---	PATH
F[7]	---	---	---	---	PATH
F[8]	---	---	---	---	PATH
F[9]	---	---	---	---	PATH
IO_opcode[0]	---	---	---	---	PATH
IO_opcode[1]	---	---	---	---	PATH
IO_opcode[2]	---	---	---	---	PATH
N_chip_select	---	5.7	---	-2.4	PATH
N_mem_read	---	---	---	---	PATH
N_mem_write	---	5.8	---	-2.5	PATH
Net_run	---	21.1	---	-4.1	PATH
Net_sync	---	5.3	---	-2.6	PATH
R[0]	---	---	---	---	PATH
R[10]	---	---	---	---	PATH
R[11]	---	---	---	---	PATH
R[12]	---	---	---	---	PATH
R[13]	---	---	---	---	PATH
R[14]	---	---	---	---	PATH
R[15]	---	---	---	---	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

****

Genesil Screen Dump -- Thu Jun 9 07:53:11 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

Genesil Version v7.0_Beta

R[12]	---	---	---	---	PATH
R[13]	---	---	---	---	PATH
R[14]	---	---	---	---	PATH
R[15]	---	---	---	---	PATH
R[16]	---	---	---	---	PATH
R[17]	---	---	---	---	PATH
R[18]	---	---	---	---	PATH
R[19]	---	---	---	---	PATH
R[1]	---	---	---	---	PATH
R[20]	---	---	---	---	PATH
R[21]	---	---	---	---	PATH
R[22]	---	---	---	---	PATH
R[23]	---	---	---	---	PATH
R[24]	---	---	---	---	PATH
R[25]	---	---	---	---	PATH
R[26]	---	---	---	---	PATH
R[27]	---	---	---	---	PATH
R[28]	---	---	---	---	PATH
R[29]	---	---	---	---	PATH
R[2]	---	---	---	---	PATH
R[30]	---	---	---	---	PATH
R[31]	---	---	---	---	PATH
R[3]	---	---	---	---	PATH
R[4]	---	---	---	---	PATH
R[5]	---	---	---	---	PATH
R[6]	---	---	---	---	PATH
R[7]	---	---	---	---	PATH
R[8]	---	---	---	---	PATH
R[9]	---	---	---	---	PATH
R_bus_en[0]	---	---	---	---	PATH
R_bus_en[1]	---	---	---	---	PATH
R_eq_f_2	---	---	---	---	PATH
Serial_in	---	5.4	---	-2.5	PATH
Transfer_in	---	4.8	---	-3.3	PATH
Transfer_out	---	13.9	---	-4.9	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

```
**********************************************************************************
                Genesil Screen Dump -- Thu Jun  9 07:54:09 1988

**********************************************************************************
Chip: ~sni/sni/xserial                                              Timing Analyzer
---------------------------Genesil Version v7.0_Beta----------------------------
 CLOCK REPORT MODE
--------------------------------------------------------------------------------
Fabline: NSC_CN12A                          Corner: GUARANTEED
  Junction Temperature:47 deg C             Voltage:5.00v
  External Clock: Net_clk
 Included setup files:
  #0  nom_phase_c              (nominal op. cond. for Net_clk)
--------------------------------------------------------------------------------
                              CLOCK TIMES (minimum)
Phase 1 High:     19.9    ns                Phase 2 High:     21.1    ns
                 ----------                                  ----------
Cycle (from Ph1):     34.6    ns            Cycle (from Ph2):     29.5    ns
                     ----------                                  ----------
Minimum Cycle Time:     41.0    ns          Symmetric Cycle Time:     42.2    ns
                       ----------                                  ----------
--------------------------------------------------------------------------------
                              CLOCK WORST CASE PATHS
Minimum Phase 1 high time is     19.9    ns set by:
                                ----------
  ** Clock delay: 4.0ns (23.9-19.9)
   Node                                Cumulative Delay      Transition
   proc_net_fifo/(internal)                 23.9                fall
   proc_net_fifo/PHASE_C                    2.1                 rise
   Net_clk/PHASE_C                          1.2                 rise
   Net_clk                                  0.0                 rise

Minimum Phase 2 high time is     21.1    ns set by:
                                ----------
  ** Clock delay: 2.3ns (23.4-21.1)
   Node                                Cumulative Delay      Transition
   <c_net_con/prefetch/(internal)           23.4                fall
   proc_net_con/prefetch/dav_ld             21.2                fall
   <et_con/prefetch/proc_net_read           19.5                fall
   <t_con/prefetch/proc_net_read'           18.7                fall
   proc_net_con/prefetch/n_dav_rd           17.8                fall
--------------------------------------------------------------------------------
 INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
--------------------------------------------------------------------------------
BACK             PHASE1_HIGH     CYCLE_PH1       DUMP_LATCH_THRESHOLD
                 PHASE2_HIGH     CYCLE_PH2       DUMP_LATCH


--------------------------------------------------------------------------------


>TIMING>CLOCKS>
```

```
**********************************************************************************
                Genesil Screen Dump -- Thu Jun  9 07:54:18 1988

**********************************************************************************
Chip: ~sni/sni/xserial                                              Timing Analyzer
-------------------------Genesil Version v7.0_Beta-----------------------------
   proc_net_con/prefetch/n_dav_rd       17.8                 fall
   <oc_net_con/prefetch/fifo_read       16.3                 fall
   <_net_con/rd_control/fifo_read       16.3                 fall
   <net_con/rd_control/fifo_read'       15.3                 fall
   <c_net_con/rd_control/xfer_out       14.1                 fall
   <_net_con/rd_control/xfer_out'       12.8                 fall
   proc_net_con/rd_control/n_run        11.1                 fall
   host_proc_sync/sync_run/n_run         7.4                 fall
   host_proc_sync/sync_run/n_run'        4.4                 fall
   host_proc_sync/sync_run/run           4.1                 rise
   host_proc_sync/sync_run/run'          3.1                 rise
   <st_proc_sync/sync_run/net_run        2.0                 rise
   Net_run/net_run                       2.0                 rise
   Net_run/net_run'                      1.9                 rise
   Net_run                               0.0                 rise

inimum cycle time (from Ph1) is   34.6    ns set by:
                                  ----------
  ** Clock delay: 2.4ns (37.0-34.6)
   Node                          Cumulative Delay      Transition
   ser_encoder/data_register/280       37.0                fall
   *<der/data_register/(internal)      35.1                fall
   <r_encoder/data_register/cb[0]      34.8                rise
   <ncoder/parity_gen/xor16_0/out      34.6                rise
   <coder/parity_gen/xor16_0/out'      34.2                rise
   <coder/parity_gen/xor16_0/m[0]      32.7                fall
   <oder/parity_gen/xor16_0/m[0]'      32.7                fall
   <coder/parity_gen/xor16_0/k[0]      30.4                rise
   <oder/parity_gen/xor16_0/k[0]'      30.3                rise
   <coder/parity_gen/xor16_0/j[1]      28.0                fall
   <oder/parity_gen/xor16_0/j[1]'      27.9                fall
   <oder/parity_gen/xor16_0/in[3]      25.8                rise
   proc_net_fifo/proc_net_do[7]        23.5                rise
   proc_net_fifo/proc_net_do[7]'       21.7                rise
   proc_net_fifo/PHASE_C                2.1                rise
----------------------------------------------------------------------------------
INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
----------------------------------------------------------------------------------
BACK            PHASE1_HIGH     CYCLE_PH1       DUMP_LATCH_THRESHOLD
                PHASE2_HIGH     CYCLE_PH2       DUMP_LATCH


----------------------------------------------------------------------------------


>TIMING>CLOCKS>
```

****

Genesil Screen Dump -- Thu Jun 9 07:54:26 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

<coder/parity_gen/xor16_0/m[0]	32.7	fall
<oder/parity_gen/xor16_0/m[0]'	32.7	fall
<coder/parity_gen/xor16_0/k[0]	30.4	rise
<oder/parity_gen/xor16_0/k[0]'	30.3	rise
<coder/parity_gen/xor16_0/j[1]	28.0	fall
<oder/parity_gen/xor16_0/j[1]'	27.9	fall
<oder/parity_gen/xor16_0/in[3]	25.8	rise
proc_net_fifo/proc_net_do[7]	23.5	rise
proc_net_fifo/proc_net_do[7]'	21.7	rise
proc_net_fifo/PHASE_C	2.1	rise
Net_clk/PHASE_C	1.2	rise
Net_clk	0.0	rise

Minimum cycle time (from Ph2) is 29.5 ns set by:

** Clock delay: 4.1ns (18.8-14.8) cycle sharing disabled

Node	Cumulative Delay	Transition
<oder/data_register/(internal)	35.1	rise
<r_encoder/data_register/cb[5]	34.6	fall
<ncoder/parity_gen/xor16_5/out	34.6	fall
<coder/parity_gen/xor16_5/out'	34.5	fall
<coder/parity_gen/xor16_5/m[0]	33.0	rise
<oder/parity_gen/xor16_5/m[0]'	33.0	rise
<coder/parity_gen/xor16_5/k[1]	30.6	fall
<oder/parity_gen/xor16_5/k[1]'	30.5	fall
<coder/parity_gen/xor16_5/j[3]	28.4	rise
<oder/parity_gen/xor16_5/j[3]'	28.3	rise
<oder/parity_gen/xor16_5/in[7]	26.0	fall
proc_net_fifo/proc_net_do[15]	24.0	fall
proc_net_fifo/proc_net_do[15]'	22.3	fall
*proc_net_fifo/(internal)	18.0	fall
proc_net_fifo/PHASE_C	1.9	fall
Net_clk/PHASE_C	0.9	fall
Net_clk	0.0	fall

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PHASE1_HIGH CYCLE_PH1 DUMP_LATCH_THRESHOLD
PHASE2_HIGH CYCLE_PH2 DUMP_LATCH

>TIMING>CLOCKS>

****

Genesil Screen Dump -- Thu Jun 9 07:54:49 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

OUTPUT DELAY MODE

Fabline: NSC_CN12A Corner: GUARANTEED
Junction Temperature:47 deg C Voltage:5.00v
External Clock: Net_clk
Included setup files:
#0 nom_phase_c (nominal op. cond. for Net_clk)

OUTPUT DELAYS (ns)

Output	Ph1(r) Delay Min	Ph1(r) Delay Max	Ph2(r) Delay Min	Ph2(r) Delay Max	Loading(pf)	
Data[0]	0.0	24.2	0.0	24.2	50.00	PATH
Data[1]	0.0	24.2	0.0	24.2	50.00	PATH
Data[2]	0.0	24.2	0.0	24.2	50.00	PATH
Data[3]	0.0	24.2	0.0	24.2	50.00	PATH
Data[4]	0.0	24.1	0.0	24.1	50.00	PATH
Data[5]	0.0	24.0	0.0	24.0	50.00	PATH
Data[6]	0.0	24.3	0.0	24.3	50.00	PATH
Data[7]	0.0	24.7	0.0	24.7	50.00	PATH
Dav	14.7	16.1	---	---	50.00	PATH
Host_dav	---	---	---	---	50.00	PATH
Host_rfi	---	---	---	---	50.00	PATH
N_xack	15.0	18.2	15.0	18.2	50.00	PATH
Net_dav	---	---	---	---	50.00	PATH
Net_error	---	---	---	---	50.00	PATH
Net_rfi	---	---	---	---	50.00	PATH
Proc_run	---	---	---	---	50.00	PATH
R[0]	0.0	21.6	0.0	21.6	50.00	PATH
R[10]	0.0	23.7	0.0	23.7	50.00	PATH
R[11]	0.0	22.3	0.0	22.3	50.00	PATH
R[12]	0.0	21.8	0.0	21.8	50.00	PATH
R[13]	0.0	21.7	0.0	21.7	50.00	PATH
R[14]	0.0	21.5	0.0	21.5	50.00	PATH
R[15]	0.0	21.4	0.0	21.4	50.00	PATH
R[16]	0.0	21.2	0.0	21.2	50.00	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>OUTPUT DELAY>

****

Genesil Screen Dump -- Thu Jun 9 07:54:59 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

Genesil Version v7.0_Beta

Proc_run	---	---	---	---	50.00	PATH
R[0]	0.0	21.6	0.0	21.6	50.00	PATH
R[10]	0.0	23.7	0.0	23.7	50.00	PATH
R[11]	0.0	22.3	0.0	22.3	50.00	PATH
R[12]	0.0	21.8	0.0	21.8	50.00	PATH
R[13]	0.0	21.7	0.0	21.7	50.00	PATH
R[14]	0.0	21.5	0.0	21.5	50.00	PATH
R[15]	0.0	21.4	0.0	21.4	50.00	PATH
R[16]	0.0	21.2	0.0	21.2	50.00	PATH
R[17]	0.0	21.1	0.0	21.1	50.00	PATH
R[18]	0.0	20.9	0.0	20.9	50.00	PATH
R[19]	0.0	20.8	0.0	20.8	50.00	PATH
R[1]	0.0	21.8	0.0	21.8	50.00	PATH
R[20]	0.0	20.9	0.0	20.9	50.00	PATH
R[21]	0.0	21.1	0.0	21.1	50.00	PATH
R[22]	0.0	21.2	0.0	21.2	50.00	PATH
R[23]	0.0	21.2	0.0	21.2	50.00	PATH
R[24]	0.0	21.3	0.0	21.3	50.00	PATH
R[25]	0.0	21.4	0.0	21.4	50.00	PATH
R[26]	0.0	21.6	0.0	21.6	50.00	PATH
R[27]	0.0	21.7	0.0	21.7	50.00	PATH
R[28]	0.0	21.9	0.0	21.9	50.00	PATH
R[29]	0.0	23.7	0.0	23.7	50.00	PATH
R[2]	0.0	22.0	0.0	22.0	50.00	PATH
R[30]	0.0	23.1	0.0	23.1	50.00	PATH
R[31]	0.0	22.8	0.0	22.8	50.00	PATH
R[3]	0.0	22.4	0.0	22.4	50.00	PATH
R[4]	0.0	22.6	0.0	22.6	50.00	PATH
R[5]	0.0	22.7	0.0	22.7	50.00	PATH
R[6]	0.0	22.9	0.0	22.9	50.00	PATH
R[7]	0.0	23.1	0.0	23.1	50.00	PATH
R[8]	0.0	23.3	0.0	23.3	50.00	PATH
R[9]	0.0	23.5	0.0	23.5	50.00	PATH
sfi	13.1	14.3	---	---	50.00	PATH
Serial_out	12.0	13.0	---	---	50.00	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>OUTPUT DELAY>

```
**********************************************************************************
              Genesil Screen Dump -- Thu Jun  9 14:27:34 1988

**********************************************************************************
Chip: ~sni/sni/xserial                                              Timing Analyzer
-------------------------Genesil Version v7.0_Beta-----------+----------------
PATH DELAY MODE                                             |    BLOCK NAME
------------------------------------------------------------|*CURRENT*
Cabline: NSC_CN12A                  Corner: GUARANTEED      |Address[0]
  Junction Temperature:47 deg C     Voltage:5.00v           |Address[1]
  External Clock: Net_clk                                   |Address[2]
Included setup files:                                       |Data[0]
  #0  nom_phase_c          (nominal op. cond. for Net_clk)  |Data[1]
------------------------------------------------------------|Data[2]
                                PATH DELAY (ns)             |Data[3]
Source Object    Connector          (Ph1) Min     Max       |Data[4]
   Dest. Object      Connector      (Ph2)   Min     Max     |Data[5]
R bus en[0]      R bus en                  14.8    16.1     |Data[6]
   Rd[7]            R                        14.8    16.1 PAT|Data[7]
R bus en[0]      R bus en                  14.1    15.4     |Dav
   Rc[7]            R                        14.1    15.4 PAT|F[0]
R bus en[0]      R bus en                  14.4    15.7     |F[10]
   Rb[7]            R                        14.4    15.7 PAT|F[11]
R bus en[0]      R bus en                  15.2    16.5     |F[12]
   Ra[7]            R                        15.2    16.5 PAT|F[13]
R bus en[0]      R bus en                  15.4    16.7     |F[14]
   Ra[0]            R                        15.4    16.7 PAT|F[15]
R bus en[1]      R bus en                  15.5    16.7     |F[16]
   Rd[7]            R                        15.5    16.7 PAT|F[17]
R bus en[1]      R bus en                  14.8    16.0     |F[18]
   Rc[7]            R                        14.8    16.0 PAT|F[19]
R bus en[1]      R bus en                  15.1    16.3     |F[1]
   Rb[7]            R                        15.1    16.3 PAT|F[20]
R bus en[1]      R bus en                  15.9    17.1     |F[21]
   Ra[7]            R                        15.9    17.1 PAT|F[22]
R bus en[1]      R bus en                  16.1    17.4     |F[23]
   Ra[0]            R                        16.1    17.4 PAT|F[24]
IO opcode[0]     IO opcode                 20.6    22.6     |F[25]
   Rd[7]            R                        20.6    22.6 PAT|F[26]
IO opcode[0]     IO opcode                 19.2    21.0     |F[27]
   Rc[7]            R                        19.2    21.0 PAT| * MORE *
------------------------------------------------------------+----------------
INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
----------------------------------------------------------------------------
BACK            PATH_DELETE_TOGGLE


--------------------------------------------------------------------------------

Enter [string]:
>TIMING>PATH DELAY>
```

```
**********************************************************************************
                Genesil Screen Dump -- Thu Jun  9 14:27:47 1988

**********************************************************************************
Chip: ~sni/sni/xserial                                              Timing Analyzer
--------------------------Genesil Version v7.0_Beta-----------+----------------
    Rc[7]              R                          19.2    21.0  PATH   BLOCK NAME
 IO opcode[0]    IO opcode                    19.4    21.2        *CURRENT*
    Rb[7]              R                          19.4    21.2  PATHAddress[0]
 IO opcode[0]    IO opcode                    20.8    22.9        Address[1]
    Ra[7]              R                          20.8    22.9  PATHAddress[2]
 IO opcode[0]    IO opcode                    19.5    21.4        Data[0]
    Ra[0]              R                          19.5    21.4  PATHData[1]
 IO opcode[1]    IO opcode                    19.9    21.3        Data[2]
    Rd[7]              R                          19.9    21.3  PATHData[3]
 IO opcode[1]    IO opcode                    18.5    19.7        Data[4]
    Rc[7]              R                          18.5    19.7  PATHData[5]
 IO opcode[1]    IO opcode                    18.7    19.9        Data[6]
    Rb[7]              R                          18.7    19.9  PATHData[7]
 IO opcode[1]    IO opcode                    20.1    21.6        Dav
    Ra[7]              R                          20.1    21.6  PATHF[0]
 IO opcode[1]    IO opcode                    18.8    20.0        F[10]
    Ra[0]              R                          18.8    20.0  PATHF[11]
 IO opcode[2]    IO opcode                    21.2    22.8        F[12]
    Rd[7]              R                          21.2    22.8  PATHF[13]
 IO opcode[2]    IO opcode                    19.8    21.2        F[14]
    Rc[7]              R                          19.8    21.2  PATHF[15]
 IO opcode[2]    IO opcode                    20.0    21.4        F[16]
    Rb[7]              R                          20.0    21.4  PATHF[17]
 IO opcode[2]    IO opcode                    21.4    23.1        F[18]
    Ra[7]              R                          21.4    23.1  PATHF[19]
 IO opcode[2]    IO opcode                    20.1    21.6        F[1]
    Ra[0]              R                          20.1    21.6  PATHF[20]
 Address[0]      Address                     21.4    24.7        F[21]
    Data[7]            Data                       21.4    24.7  PATHF[22]
 Address[0]      Address                     21.0    24.2        F[23]
    Data[3]            Data                       21.0    24.2  PATHF[24]
 Address[0]      Address                     21.0    24.2        F[25]
    Data[0]            Data                       21.0    24.2  PATHF[26]
 Address[1]      Address                     19.1    21.6        F[27]
    Data[7]            Data                       19.1    21.6  PATH * MORE *
----------------------------------------------------------------+----------------
 INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD       UTILITY
--------------------------------------------------------------------------------
BACK            PATH_DELETE_TOGGLE


--------------------------------------------------------------------------------

nter [string]:
>TIMING>PATH DELAY>
```

```
**********************************************************************************
                Genesil Screen Dump -- Thu Jun  9 14:28:01 1988

**********************************************************************************
Chip: ~sni/sni/xserial                                                Timing Analyzer
-------------------------Genesil Version v7.0_Beta-----------+----------------
    Data[3]          Data                          21.0     24.2  PATH   BLOCK NAME
Address[0]       Address                       21.0     24.2       *CURRENT*
    Data[0]          Data                          21.0     24.2  PATHAddress[0]
Address[1]       Address                       19.1     21.6       Address[1]
    Data[7]          Data                          19.1     21.6  PATHAddress[2]
Address[1]       Address                       18.7     21.1       Data[0]
    Data[3]          Data                          18.7     21.1  PATHData[1]
Address[1]       Address                       18.7     21.1       Data[2]
    Data[0]          Data                          18.7     21.1  PATHData[3]
Address[2]       Address                       17.7     19.7       Data[4]
    Data[7]          Data                          17.7     19.7  PATHData[5]
Address[2]       Address                       17.3     19.2       Data[6]
    Data[3]          Data                          17.3     19.2  PATHData[7]
Address[2]       Address                       17.3     19.2       Dav
    Data[0]          Data                          17.3     19.2  PATHF[0]
N mem read       N mem read                    16.7     18.1       F[10]
    Data[7]          Data                          16.7     18.1  PATHF[11]
N mem read       N mem read                    16.9     18.3       F[12]
    Data[3]          Data                          16.9     18.3  PATHF[13]
N mem read       N mem read                    16.9     18.3       F[14]
    Data[0]          Data                          16.9     18.3  PATHF[15]
N chip select    N chip select                 18.3     19.7       F[16]
    Data[7]          Data                          18.3     19.7  PATHF[17]
N chip select    N chip select                 18.5     19.9       F[18]
    Data[3]          Data                          18.5     19.9  PATHF[19]
N chip select    N chip select                 18.5     19.9       F[1]
    Data[0]          Data                          18.5     19.9  PATHF[20]
N mem read       N mem read                    15.0     16.4       F[21]
    N xack           N xack                        15.0     16.4  PATHF[22]
N mem write      N mem write                   16.8     18.2       F[23]
    N xack           N xack                        16.8     18.2  PATHF[24]
N chip select    N chip select                 16.6     18.2       F[25]
    N xack           N xack                        16.6     18.2  PATHF[26]
                                                                   F[27]
                                                                    * MORE *
-----------------------------------------------------------------+----------------
INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD       UTILITY
---------------------------------------------------------------------------------
BACK            PATH_DELETE_TOGGLE


---------------------------------------------------------------------------------

Enter [string]:
>TIMING>PATH DELAY>
```

****

Genesil Screen Dump -- Thu Jun 9 16:20:10 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

SETUP AND HOLD MODE

Fabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:92 deg C Voltage:4.50v

External Clock: Net_clk

Included setup files:

#0 max_phase_c (max. temp. min v. for Net_clk)

INPUT SETUP AND HOLD TIMES (ns)

Input	Setup Time Ph1(f)	Setup Time Ph2(f)	Hold Time Ph1(f)	Hold Time Ph2(f)	
Address[0]	---	8.4	---	-4.7	PATH
Address[1]	---	8.5	---	-4.8	PATH
Address[2]	---	8.5	---	-4.7	PATH
Data[0]	---	5.7	---	-3.6	PATH
Data[1]	---	5.8	---	-3.7	PATH
Data[2]	---	5.8	---	-3.7	PATH
Data[3]	---	5.8	---	-3.7	PATH
Data[4]	---	6.5	---	-4.6	PATH
Data[5]	---	6.5	---	-4.6	PATH
Data[6]	---	6.5	---	-4.6	PATH
Data[7]	---	6.5	---	-4.5	PATH
[0]	---	---	---	---	PATH
[10]	---	---	---	---	PATH
F[11]	---	---	---	---	PATH
F[12]	---	---	---	---	PATH
[13]	---	---	---	---	PATH
[14]	---	---	---	---	PATH
F[15]	---	---	---	---	PATH
[16]	---	---	---	---	PATH
[17]	---	---	---	---	PATH
F[18]	---	---	---	---	PATH
F[19]	---	---	---	---	PATH
[1]	---	---	---	---	PATH
[20]	---	---	---	---	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

****

Genesil Screen Dump -- Thu Jun 9 16:20:21 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

Genesil Version v7.0_Beta

F[20]	---	---	---	---	PATH
F[21]	---	---	---	---	PATH
F[22]	---	---	---	---	PATH
F[23]	---	---	---	---	PATH
F[24]	---	---	---	---	PATH
F[25]	---	---	---	---	PATH
F[26]	---	---	---	---	PATH
F[27]	---	---	---	---	PATH
F[28]	---	---	---	---	PATH
F[29]	---	---	---	---	PATH
F[2]	---	---	---	---	PATH
F[30]	---	---	---	---	PATH
F[31]	---	---	---	---	PATH
F[3]	---	---	---	---	PATH
F[4]	---	---	---	---	PATH
F[5]	---	---	---	---	PATH
F[6]	---	---	---	---	PATH
F[7]	---	---	---	---	PATH
F[8]	---	---	---	---	PATH
F[9]	---	---	---	---	PATH
IO_opcode[0]	---	---	---	---	PATH
IO_opcode[1]	---	---	---	---	PATH
IO_opcode[2]	---	---	---	---	PATH
N_chip_select	---	6.5	---	-2.8	PATH
N_mem_read	---	---	---	---	PATH
N_mem_write	---	6.6	---	-2.9	PATH
Net_run	---	23.6	---	-4.7	PATH
Net_sync	---	6.0	---	-3.1	PATH
R[0]	---	---	---	---	PATH
R[10]	---	---	---	---	PATH
R[11]	---	---	---	---	PATH
R[12]	---	---	---	---	PATH
R[13]	---	---	---	---	PATH
R[14]	---	---	---	---	PATH
R[15]	---	---	---	---	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

```
*****************************************************************************
              Genesil Screen Dump -- Thu Jun  9 16:20:49 1988

*****************************************************************************
Chip: ~sni/sni/xserial                                          Timing Analyzer
-------------------------Genesil Version v7.0_Beta--------------------------
CLOCK REPORT MODE
-----------------------------------------------------------------------------
Fabline: NSC_CN12A                      Corner: GUARANTEED
  Junction Temperature:92 deg C         Voltage:4.50v
  External Clock: Net_clk
 Included setup files:
  #0  max_phase_c            (max. temp. min v. for Net_clk)
-----------------------------------------------------------------------------
                              CLOCK TIMES (minimum)
Phase 1 High:    22.1   ns              Phase 2 High:    23.6   ns
           ----------                              ----------
Cycle (from Ph1):    38.6   ns         Cycle (from Ph2):    32.8   ns
                  ----------                              ----------
Minimum Cycle Time:    45.7   ns       Symmetric Cycle Time:     47.1   ns
                    ----------                              ----------
-----------------------------------------------------------------------------
                              CLOCK WORST CASE PATHS
Minimum Phase 1 high time is    22.1   ns set by:
                              ----------
  ** Clock delay: 4.4ns (26.5-22.1)
   Node                              Cumulative Delay      Transition
   proc_net_fifo/(internal)               26.5                fall
   proc_net_fifo/PHASE_C                   2.2                rise
   Net_clk/PHASE_C                         1.2                rise
   Net_clk                                 0.0                rise

Minimum Phase 2 high time is    23.6   ns set by:
                              ----------
  ** Clock delay: 2.4ns (26.0-23.6)
   Node                              Cumulative Delay      Transition
   <c_net_con/prefetch/(internal)         26.0                fall
   proc_net_con/prefetch/dav_ld           23.6                fall
   <et_con/prefetch/proc_net_read         21.6                fall
   <t_con/prefetch/proc_net_read'         20.7                fall
   proc_net_con/prefetch/n_dav_rd         19.7                fall
-----------------------------------------------------------------------------
INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
-----------------------------------------------------------------------------
BACK            PHASE1_HIGH     CYCLE_PH1       DUMP_LATCH_THRESHOLD
                PHASE2_HIGH     CYCLE_PH2       DUMP_LATCH


-----------------------------------------------------------------------------


>TIMING>CLOCKS>
```

****

Genesil Screen Dump -- Thu Jun 9 16:21:16 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

proc_net_con/prefetch/n_dav_rd	19.7	fall
<oc_net_con/prefetch/fifo_read	18.1	fall
<_net_con/rd_control/fifo_read	18.1	fall
<net_con/rd_control/fifo_read'	17.0	fall
<c_net_con/rd_control/xfer_out	15.7	fall
<_net_con/rd_control/xfer_out'	14.2	fall
proc_net_con/rd_control/n_run	12.3	fall
host_proc_sync/sync_run/n_run	8.2	fall
host_proc_sync/sync_run/n_run'	4.9	fall
host_proc_sync/sync_run/run	4.6	rise
host_proc_sync/sync_run/run'	3.4	rise
<st_proc_sync/sync_run/net_run	2.3	rise
Net_run/net_run	2.2	rise
Net_run/net_run'	2.1	rise
Net_run	0.0	rise

Minimum cycle time (from Ph1) is 38.6 ns set by:

** Clock delay: 2.5ns (41.1-38.6)

Node	Cumulative Delay	Transition
ser_encoder/data_register/280	41.1	fall
*<der/data_register/(internal)	39.0	fall
<r_encoder/data_register/cb[0]	38.7	rise
<ncoder/parity_gen/xor16_0/out	38.4	rise
<coder/parity_gen/xor16_0/out'	38.1	rise
<coder/parity_gen/xor16_0/m[0]	36.3	fall
<oder/parity_gen/xor16_0/m[0]'	36.3	fall
<coder/parity_gen/xor16_0/k[0]	33.8	rise
<oder/parity_gen/xor16_0/k[0]'	33.7	rise
<coder/parity_gen/xor16_0/j[1]	31.2	fall
<oder/parity_gen/xor16_0/j[1]'	31.1	fall
<oder/parity_gen/xor16_0/in[3]	28.7	rise
proc_net_fifo/proc_net_do[7]	26.1	rise
proc_net_fifo/proc_net_do[7]'	24.2	rise
proc_net_fifo/PHASE_C	2.2	rise

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PHASE1_HIGH CYCLE_PH1 DUMP_LATCH_THRESHOLD
PHASE2_HIGH CYCLE_PH2 DUMP_LATCH

>TIMING>CLOCKS>

Jun 10 08:57 1988 timing_at_92C_4.5V Page 7

```
**********************************************************************************
                Genesil Screen Dump -- Thu Jun  9 16:21:23 1988
**********************************************************************************
Chip: ~sni/sni/xserial                                              Timing Analyzer
---------------------------Genesil Version v7.0_Beta----------------------------
   <coder/parity_gen/xor16_0/m[0]      36.3                 fall
   <oder/parity_gen/xor16_0/m[0]'      36.3                 fall
   <coder/parity_gen/xor16_0/k[0]      33.8                 rise
   <oder/parity_gen/xor16_0/k[0]'      33.7                 rise
   <coder/parity_gen/xor16_0/j[1]      31.2                 fall
   <oder/parity_gen/xor16_0/j[1]'      31.1                 fall
   <oder/parity_gen/xor16_0/in[3]      28.7                 rise
   proc_net_fifo/proc_net_do[7]        26.1                 rise
   proc_net_fifo/proc_net_do[7]'       24.2                 rise
   proc_net_fifo/PHASE_C                2.2                 rise
   Net_clk/PHASE_C                      1.2                 rise
   Net_clk                              0.0                 rise

Minimum cycle time (from Ph2) is   32.8    ns set by:
                                   ----------
  ** Clock delay: 4.4ns (20.8-16.4) cycle_sharing disabled
   Node                              Cumulative Delay      Transition
   <oder/data_register/(internal)      38.9                 rise
   <r_encoder/data_register/cb[5]      38.3                 fall
   <ncoder/parity_gen/xor16_5/out      38.3                 fall
   <coder/parity_gen/xor16_5/out'      38.2                 fall
   <coder/parity_gen/xor16_5/m[0]      36.6                 rise
   <oder/parity_gen/xor16_5/m[0]'      36.5                 rise
   <coder/parity_gen/xor16_5/k[1]      33.8                 fall
   <oder/parity_gen/xor16_5/k[1]'      33.8                 fall
   <coder/parity_gen/xor16_5/j[3]      31.4                 rise
   <oder/parity_gen/xor16_5/j[3]'      31.3                 rise
   <oder/parity_gen/xor16_5/in[7]      28.8                 fall
   proc_net_fifo/proc_net_do[15]       26.5                 fall
   proc_net_fifo/proc_net_do[15]'      24.7                 fall
   *proc_net_fifo/(internal)           19.9                 fall
   proc_net_fifo/PHASE_C                2.0                 fall
   Net_clk/PHASE_C                      0.9                 fall
   Net_clk                              0.0                 fall
--------------------------------------------------------------------------------
--------------------------------------------------------------------------------
 INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
--------------------------------------------------------------------------------
 BACK            PHASE1_HIGH     CYCLE_PH1       DUMP_LATCH_THRESHOLD
                 PHASE2_HIGH     CYCLE_PH2       DUMP_LATCH


--------------------------------------------------------------------------------


 >TIMING>CLOCKS>
```

Jun 10 08:57 1988 timing_at_92C_4.5V Page 8

****

Genesil Screen Dump -- Thu Jun 9 16:21:47 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

OUTPUT DELAY MODE

Tabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:92 deg C Voltage:4.50v

External Clock: Net_clk

Included setup files:

#0 max_phase_c (max. temp. min v. for Net_clk)

	OUTPUT DELAYS (ns)					
Output	Ph1(r) Delay Min	Max	Ph2(r) Delay Min	Max	Loading(pf)	
Data[0]	0.0	26.8	0.0	26.8	50.00	PATH
Data[1]	0.0	26.8	0.0	26.8	50.00	PATH
Data[2]	0.0	26.8	0.0	26.8	50.00	PATH
Data[3]	0.0	26.8	0.0	26.8	50.00	PATH
Data[4]	0.0	26.8	0.0	26.8	50.00	PATH
Data[5]	0.0	26.6	0.0	26.6	50.00	PATH
Data[6]	0.0	26.9	0.0	26.9	50.00	PATH
Data[7]	0.0	27.4	0.0	27.4	50.00	PATH
Dav	16.3	17.7	---	---	50.00	PATH
Host_dav	---	---	---	---	50.00	PATH
Host_rfi	---	---	---	---	50.00	PATH
N_xack	16.7	20.2	16.7	20.2	50.00	PATH
Net_dav	---	---	---	---	50.00	PATH
Net_error	---	---	---	---	50.00	PATH
Net_rfi	---	---	---	---	50.00	PATH
Proc_run	---	---	---	---	50.00	PATH
R[0]	0.0	23.9	0.0	23.9	50.00	PATH
R[10]	0.0	26.3	0.0	26.3	50.00	PATH
R[11]	0.0	24.7	0.0	24.7	50.00	PATH
R[12]	0.0	24.2	0.0	24.2	50.00	PATH
R[13]	0.0	24.1	0.0	24.1	50.00	PATH
R[14]	0.0	23.9	0.0	23.9	50.00	PATH
R[15]	0.0	23.7	0.0	23.7	50.00	PATH
R[16]	0.0	23.5	0.0	23.5	50.00	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>OUTPUT DELAY>

Jun 10 08:57 1988 timing_at_92C_4.5V Page 9

****

Genesil Screen Dump -- Thu Jun 9 16:21:56 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

Proc_run	---	---	---	---	50.00	PATH
R[0]	0.0	23.9	0.0	23.9	50.00	PATH
R[10]	0.0	26.3	0.0	26.3	50.00	PATH
R[11]	0.0	24.7	0.0	24.7	50.00	PATH
R[12]	0.0	24.2	0.0	24.2	50.00	PATH
R[13]	0.0	24.1	0.0	24.1	50.00	PATH
R[14]	0.0	23.9	0.0	23.9	50.00	PATH
R[15]	0.0	23.7	0.0	23.7	50.00	PATH
R[16]	0.0	23.5	0.0	23.5	50.00	PATH
R[17]	0.0	23.4	0.0	23.4	50.00	PATH
R[18]	0.0	23.2	0.0	23.2	50.00	PATH
R[19]	0.0	23.1	0.0	23.1	50.00	PATH
R[1]	0.0	24.2	0.0	24.2	50.00	PATH
R[20]	0.0	23.2	0.0	23.2	50.00	PATH
R[21]	0.0	23.4	0.0	23.4	50.00	PATH
R[22]	0.0	23.6	0.0	23.6	50.00	PATH
R[23]	0.0	23.5	0.0	23.5	50.00	PATH
R[24]	0.0	23.7	0.0	23.7	50.00	PATH
R[25]	0.0	23.8	0.0	23.8	50.00	PATH
R[26]	0.0	24.0	0.0	24.0	50.00	PATH
R[27]	0.0	24.2	0.0	24.2	50.00	PATH
R[28]	0.0	24.3	0.0	24.3	50.00	PATH
R[29]	0.0	26.3	0.0	26.3	50.00	PATH
R[2]	0.0	24.4	0.0	24.4	50.00	PATH
R[30]	0.0	25.6	0.0	25.6	50.00	PATH
R[31]	0.0	25.3	0.0	25.3	50.00	PATH
R[3]	0.0	24.9	0.0	24.9	50.00	PATH
R[4]	0.0	25.1	0.0	25.1	50.00	PATH
R[5]	0.0	25.3	0.0	25.3	50.00	PATH
R[6]	0.0	25.4	0.0	25.4	50.00	PATH
R[7]	0.0	25.6	0.0	25.6	50.00	PATH
R[8]	0.0	25.8	0.0	25.8	50.00	PATH
R[9]	0.0	26.1	0.0	26.1	50.00	PATH
fi	14.5	15.7	---	---	50.00	PATH
Serial_out	13.1	14.4	---	---	50.00	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>OUTPUT DELAY>

```
Jun 10 08:57 1988  timing_at_92C_4.5V Page 10

*******************************************************************************
                Genesil Screen Dump -- Thu Jun  9 16:22:27 1988

*******************************************************************************
Chip: ~sni/sni/xserial                                          Timing Analyzer
---------------------------Genesil Version v7.0_Beta---------------------------
VIOLATION MODE
-------------------------------------------------------------------------------
Fabline: NSC_CN12A                        Corner: GUARANTEED
  Junction Temperature:92 deg C           Voltage:4.50v
  External Clock: Net_clk
 Included setup files:
  #0  max_phase_c              (max. temp. min v. for Net_clk)
-------------------------------------------------------------------------------
                                NO VIOLATIONS
 Hold time check margin: 0.0ns

-------------------------------------------------------------------------------
 INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
-------------------------------------------------------------------------------
BACK

-------------------------------------------------------------------------------

>TIMING>VIOLATIONS>
```

Jun 10 08:57 1988 timing_at_92C_4.5V Page 11

****

Genesil Screen Dump -- Fri Jun 10 06:57:09 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

SETUP AND HOLD MODE

Fabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:92 deg C Voltage:4.50v

External Clock: Proc_clk

Included setup files:

#0 max_phase_a (max. temp. min v. for Proc_clk)

INPUT SETUP AND HOLD TIMES (ns)

Input	Setup Time Ph1(f)	Setup Time Ph2(f)	Hold Time Ph1(f)	Hold Time Ph2(f)	
Address[0]	---	9.9	---	-6.2	PATH
Address[1]	---	10.1	---	-6.4	PATH
Address[2]	---	10.0	---	-6.2	PATH
Data[0]	---	6.8	---	-2.9	PATH
Data[1]	---	6.9	---	-3.0	PATH
Data[2]	---	6.8	---	-2.9	PATH
Data[3]	---	6.7	---	-2.9	PATH
Data[4]	---	8.1	---	-4.3	PATH
Data[5]	---	8.1	---	-4.3	PATH
Data[6]	---	7.9	---	-4.2	PATH
Data[7]	---	7.7	---	-4.0	PATH
[0]	---	0.6	---	1.0	PATH
[10]	---	0.5	---	1.1	PATH
F[11]	---	0.5	---	1.1	PATH
F[12]	---	0.5	---	1.1	PATH
[13]	---	0.5	---	1.1	PATH
[14]	---	0.5	---	1.1	PATH
F[15]	---	0.5	---	1.1	PATH
[16]	---	0.5	---	1.1	PATH
[17]	---	0.5	---	1.1	PATH
F[18]	---	0.5	---	1.1	PATH
F[19]	---	0.4	---	1.1	PATH
[1]	---	0.6	---	1.0	PATH
[20]	---	0.4	---	1.1	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

Jun 10 08:57 1988 timing_at_92C_4.5V Page 12

****

Genesil Screen Dump -- Fri Jun 10 06:57:22 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

F[20]	---	0.4	---	1.1	PATH
F[21]	---	0.4	---	1.1	PATH
F[22]	---	0.4	---	1.2	PATH
F[23]	---	0.4	---	1.2	PATH
F[24]	---	0.4	---	1.2	PATH
F[25]	---	0.4	---	1.2	PATH
F[26]	---	0.4	---	1.2	PATH
F[27]	---	0.4	---	1.2	PATH
F[28]	---	0.4	---	1.2	PATH
F[29]	---	0.4	---	1.2	PATH
F[2]	---	0.6	---	1.0	PATH
F[30]	---	0.4	---	1.2	PATH
F[31]	---	0.4	---	1.2	PATH
F[3]	---	0.5	---	1.0	PATH
F[4]	---	0.5	---	1.0	PATH
F[5]	---	0.5	---	1.1	PATH
F[6]	---	0.5	---	1.1	PATH
F[7]	---	0.5	---	1.1	PATH
F[8]	---	0.5	---	1.1	PATH
F[9]	---	0.5	---	1.1	PATH
IO_opcode[0]	---	26.8	---	-8.2	PATH
IO_opcode[1]	---	25.4	---	-8.4	PATH
IO_opcode[2]	---	27.0	---	-9.4	PATH
N_chip_select	---	9.3	---	-5.5	PATH
N_mem_read	---	6.3	---	-2.6	PATH
N_mem_write	---	7.9	---	-4.2	PATH
Net_run	---	5.2	---	-1.4	PATH
Net_sync	---	---	---	---	PATH
R[0]	---	0.5	---	1.3	PATH
R[10]	---	0.6	---	1.3	PATH
R[11]	---	0.6	---	1.3	PATH
R[12]	---	0.6	---	1.2	PATH
R[13]	---	0.6	---	1.2	PATH
R[14]	---	0.6	---	1.2	PATH
R[15]	---	0.6	---	1.2	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

Jun 10 08:57 1988 timing_at_92C_4.5V Page 13

****

Genesil Screen Dump -- Fri Jun 10 06:57:33 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

Genesil Version v7.0_Beta

R[12]	---	0.6	---	1.2	PATH
R[13]	---	0.6	---	1.2	PATH
R[14]	---	0.6	---	1.2	PATH
R[15]	---	0.6	---	1.2	PATH
R[16]	---	0.6	---	1.2	PATH
R[17]	---	0.7	---	1.2	PATH
R[18]	---	0.7	---	1.2	PATH
R[19]	---	0.7	---	1.2	PATH
R[1]	---	0.5	---	1.3	PATH
R[20]	---	0.8	---	1.1	PATH
R[21]	---	0.8	---	1.0	PATH
R[22]	---	0.8	---	1.0	PATH
R[23]	---	0.9	---	1.0	PATH
R[24]	---	0.9	---	1.0	PATH
R[25]	---	0.9	---	0.9	PATH
R[26]	---	0.9	---	0.9	PATH
R[27]	---	0.9	---	0.9	PATH
R[28]	---	0.9	---	0.9	PATH
R[29]	---	1.0	---	0.9	PATH
R[2]	---	0.5	---	1.3	PATH
R[30]	---	1.0	---	0.8	PATH
R[31]	---	1.0	---	0.8	PATH
R[3]	---	0.5	---	1.3	PATH
R[4]	---	0.5	---	1.3	PATH
R[5]	---	0.5	---	1.3	PATH
R[6]	---	0.6	---	1.3	PATH
R[7]	---	0.6	---	1.3	PATH
R[8]	---	0.6	---	1.3	PATH
R[9]	---	0.6	---	1.3	PATH
R_bus_en[0]	---	18.7	---	-15.0	PATH
R_bus_en[1]	---	19.4	---	-15.8	PATH
R_eq_f_2	---	0.6	---	0.9	PATH
serial_in	---	---	---	---	PATH
transfer_in	---	---	---	---	PATH
transfer_out	---	---	---	---	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>SETUP HOLD>

Jun 10 08:57 1988 timing_at_92C_4.5V Page 14

****

Genesil Screen Dump -- Fri Jun 10 06:58:04 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

CLOCK REPORT MODE

Fabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:92 deg C Voltage:4.50v

External Clock: Proc_clk

Included setup files:

#0 max_phase_a (max. temp. min v. for Proc_clk)

CLOCK TIMES (minimum)

Phase 1 High:	23.1 ns	Phase 2 High:	27.0 ns
Cycle (from Ph1):	46.4 ns	Cycle (from Ph2):	78.2 ns
Minimum Cycle Time:	78.2 ns	Symmetric Cycle Time:	78.2 ns

CLOCK WORST CASE PATHS

Minimum Phase 1 high time is 23.1 ns set by:

** Clock delay: 1.9ns (25.0-23.1)

Node	Cumulative Delay	Transition
host_data_latch/(internal)	25.0	rise
host_data_latch/wr[1]	23.2	fall
host_data_latch/wr[1]'	23.0	fall
host_data_latch/dec_en	21.7	fall
host_data_latch/host_proc_mwtc	19.8	fall
<oc_sync/stage2/host_proc_mwtc	18.3	fall
<c_sync/stage2/host_proc_mwtc'	7.7	fall
<st_proc_sync/stage2/n_cs_sync	6.7	rise
host_proc_sync/stage2/cs_sync	5.8	fall
host_proc_sync/stage1/cs_sync	5.8	fall
host_proc_sync/stage1/cs_sync'	5.4	fall
host_proc_sync/stage1/PHASE_A	2.3	rise
Proc_clk/PHASE_A	1.2	rise
Proc_clk	0.0	rise

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PHASE1_HIGH CYCLE_PH1 DUMP_LATCH_THRESHOLD

PHASE2_HIGH CYCLE_PH2 DUMP_LATCH

>TIMING>CLOCKS>

****

Genesil Screen Dump -- Fri Jun 10 06:58:13 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

Proc_clk 0.0 rise

Minimum Phase 2 high time is 27.0 ns set by:

** Clock delay: 4.1ns (31.1-27.0)

Node	Cumulative Delay	Transition
Rd[5]/(internal)	31.1	rise
R[29]	26.3	fall
Rd[5]/r	19.4	fall
proc_out_mux/r[29]	18.2	fall
proc_out_mux/r[29]'	13.6	fall
proc_out_mux/net_read	10.7	rise
opcode_decoder/net_read	10.4	rise
opcode_decoder/net_read'	9.6	rise
opcode_decoder/n_io_opcode[2]	8.4	rise
opcode_decoder/n_io_opcode[2]'	8.3	rise
opcode_decoder/io_opcode[2]	6.9	fall
IO_opcode[2]/io_opcode	5.1	fall
IO_opcode[2]/io_opcode'	3.8	fall
IO_opcode[2]	0.0	fall

Minimum cycle time (from Ph1) is 46.4 ns set by:

** Clock delay: 2.2ns (48.7-46.4)

Node	Cumulative Delay	Transition
proc_host_fifo/(internal)	48.7	fall
proc_host_fifo/r[29]	48.3	rise
proc_in_mux/proc_din[29]	47.6	rise
proc_in_mux/proc_din[29]'	43.9	rise
proc_in_mux/r_in[29]	42.4	rise
Rd[5]/r_in	41.9	rise
Rd[5]/r_in'	41.7	rise
*Rd[5]/(internal)	40.1	fall
R[29]	37.1	rise
Rd[5]/r	30.8	rise

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PHASE1_HIGH CYCLE_PH1 DUMP_LATCH_THRESHOLD

PHASE2_HIGH CYCLE_PH2 DUMP_LATCH

>TIMING>CLOCKS>

****

Genesil Screen Dump -- Fri Jun 10 06:58:22 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

Rd[5]/r	30.8	rise
proc_out_mux/r[29]	29.8	rise
proc_out_mux/r[29]'	26.0	rise
proc_out_mux/net_proc_do[29]	24.5	rise
net_proc_fifo/net_proc_do[29]	24.3	rise
net_proc_fifo/net_proc_do[29]'	24.2	rise
net_proc_fifo/PHASE_A	2.3	rise
Proc_clk/PHASE_A	1.2	rise
Proc_clk	0.0	rise

Minimum cycle time (from Ph2) is 78.2 ns set by:

** Clock delay: 2.2ns (41.3-39.1) cycle_sharing disabled

Node	Cumulative Delay	Transition
Data[2]	65.9	fall
Data[2]/host_dout	59.5	fall
<eceiver/8to1_mux/host_dout[2]	59.2	fall
<ceiver/8to1_mux/host_dout[2]'	56.7	fall
<ver/8to1_mux/proc_host_do[10]	52.0	fall
<eceiver/latch/ph_do_latch[10]	51.9	fall
<ceiver/latch/ph_do_latch[10]'	51.8	fall
<ceiver/latch/proc_host_do[10]	47.9	fall
<oc_host_fifo/proc_host_do[10]	47.6	fall
<c_host_fifo/proc_host_do[10]'	46.6	fall
*proc_host_fifo/(internal)	39.9	rise
proc_host_fifo/r[10]	39.4	fall
proc_in_mux/proc_din[10]	39.1	fall
proc_in_mux/proc_din[10]'	35.5	fall
proc_in_mux/r_in[10]	33.7	fall
Rb[2]/r_in	32.4	fall
Rb[2]/r_in'	31.4	fall
R[10]	26.3	fall
Rb[2]/r	19.4	fall
proc_out_mux/r[10]	18.2	fall
proc_out_mux/r[10]'	13.6	fall

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PHASE1_HIGH CYCLE_PH1 DUMP_LATCH_THRESHOLD
PHASE2_HIGH CYCLE_PH2 DUMP_LATCH

>TIMING>CLOCKS>

Jun 10 08:57 1988 timing_at_92C_4.5V Page 17

****

Genesil Screen Dump -- Fri Jun 10 06:58:28 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

Minimum cycle time (from Ph2) is 78.2 ns set by:

** Clock delay: 2.2ns (41.3-39.1) cycle_sharing disabled

Node	Cumulative Delay	Transition
Data[2]	65.9	fall
Data[2]/host_dout	59.5	fall
<eceiver/8to1_mux/host_dout[2]	59.2	fall
<ceiver/8to1_mux/host_dout[2]'	56.7	fall
<ver/8to1_mux/proc_host_do[10]	52.0	fall
<eceiver/latch/ph_do_latch[10]	51.9	fall
<ceiver/latch/ph_do_latch[10]'	51.8	fall
<ceiver/latch/proc_host_do[10]	47.9	fall
<oc_host_fifo/proc_host_do[10]	47.6	fall
<c_host_fifo/proc_host_do[10]'	46.6	fall
*proc_host_fifo/(internal)	39.9	rise
proc_host_fifo/r[10]	39.4	fall
proc_in_mux/proc_din[10]	39.1	fall
proc_in_mux/proc_din[10]'	35.5	fall
proc_in_mux/r_in[10]	33.7	fall
Rb[2]/r_in	32.4	fall
Rb[2]/r_in'	31.4	fall
R[10]	26.3	fall
Rb[2]/r	19.4	fall
proc_out_mux/r[10]	18.2	fall
proc_out_mux/r[10]'	13.6	fall
proc_out_mux/net_read	10.7	rise
opcode_decoder/net_read	10.4	rise
opcode_decoder/net_read'	9.6	rise
opcode_decoder/n_io_opcode[2]	8.4	rise
opcode_decoder/n_io_opcode[2]'	8.3	rise
opcode_decoder/io_opcode[2]	6.9	fall
IO_opcode[2]/io_opcode	5.1	fall
IO_opcode[2]/io_opcode'	3.8	fall
IO_opcode[2]	0.0	fall

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PHASE1_HIGH CYCLE_PH1 DUMP_LATCH_THRESHOLD
PHASE2_HIGH CYCLE_PH2 DUMP_LATCH

>TIMING>CLOCKS>

Jun 10 08:57 1988 timing_at_92C_4.5V Page 18

****

Genesil Screen Dump -- Fri Jun 10 06:58:55 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

OUTPUT DELAY MODE

Fabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:92 deg C Voltage:4.50v

External Clock: Proc_clk

Included setup files:

#0 max_phase_a (max. temp. min v. for Proc_clk)

OUTPUT DELAYS (ns)

Output	Ph1(r) Delay Min	Ph1(r) Delay Max	Ph2(r) Delay Min	Ph2(r) Delay Max	Loading(pf)	
Data[0]	0.0	28.6	0.0	26.8	50.00	PATH
Data[1]	0.0	28.6	0.0	26.8	50.00	PATH
Data[2]	0.0	28.6	0.0	26.8	50.00	PATH
Data[3]	0.0	28.7	0.0	26.8	50.00	PATH
Data[4]	0.0	28.7	0.0	26.8	50.00	PATH
Data[5]	0.0	28.5	0.0	26.6	50.00	PATH
Data[6]	0.0	28.9	0.0	26.9	50.00	PATH
Data[7]	0.0	29.1	0.0	27.4	50.00	PATH
Dav	---	---	---	---	50.00	PATH
Host_dav	13.9	15.1	---	---	50.00	PATH
Host_rfi	17.7	20.7	---	---	50.00	PATH
_xack	14.2	20.2	16.7	20.2	50.00	PATH
Net_dav	14.0	15.2	---	---	50.00	PATH
Net_error	15.0	31.2	---	---	50.00	PATH
Net_rfi	16.3	31.1	---	---	50.00	PATH
Proc_run	13.0	15.7	---	---	50.00	PATH
R[0]	0.0	33.8	0.0	23.9	50.00	PATH
R[10]	0.0	36.9	0.0	26.3	50.00	PATH
R[11]	0.0	35.5	0.0	24.7	50.00	PATH
R[12]	0.0	35.1	0.0	24.2	50.00	PATH
R[13]	0.0	35.0	0.0	24.1	50.00	PATH
R[14]	0.0	34.9	0.0	23.9	50.00	PATH
R[15]	0.0	34.7	0.0	23.7	50.00	PATH
R[16]	0.0	33.6	0.0	23.5	50.00	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>OUTPUT DELAY>

****

Genesil Screen Dump -- Fri Jun 10 06:59:07 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

Genesil Version v7.0_Beta

Proc_run	13.0	15.7	---	---	50.00	PATH
R[0]	0.0	33.8	0.0	23.9	50.00	PATH
R[10]	0.0	36.9	0.0	26.3	50.00	PATH
R[11]	0.0	35.5	0.0	24.7	50.00	PATH
R[12]	0.0	35.1	0.0	24.2	50.00	PATH
R[13]	0.0	35.0	0.0	24.1	50.00	PATH
R[14]	0.0	34.9	0.0	23.9	50.00	PATH
R[15]	0.0	34.7	0.0	23.7	50.00	PATH
R[16]	0.0	33.6	0.0	23.5	50.00	PATH
R[17]	0.0	33.4	0.0	23.4	50.00	PATH
R[18]	0.0	33.3	0.0	23.2	50.00	PATH
R[19]	0.0	33.2	0.0	23.1	50.00	PATH
R[1]	0.0	34.0	0.0	24.2	50.00	PATH
R[20]	0.0	33.3	0.0	23.2	50.00	PATH
R[21]	0.0	33.5	0.0	23.4	50.00	PATH
R[22]	0.0	33.6	0.0	23.6	50.00	PATH
R[23]	0.0	33.6	0.0	23.5	50.00	PATH
R[24]	0.0	33.8	0.0	23.7	50.00	PATH
R[25]	0.0	33.9	0.0	23.8	50.00	PATH
R[26]	0.0	34.0	0.0	24.0	50.00	PATH
R[27]	0.0	35.2	0.0	24.2	50.00	PATH
R[28]	0.0	35.3	0.0	24.3	50.00	PATH
R[29]	0.0	37.1	0.0	26.3	50.00	PATH
R[2]	0.0	34.2	0.0	24.4	50.00	PATH
R[30]	0.0	36.5	0.0	25.6	50.00	PATH
R[31]	0.0	36.2	0.0	25.3	50.00	PATH
R[3]	0.0	34.6	0.0	24.9	50.00	PATH
R[4]	0.0	34.8	0.0	25.1	50.00	PATH
R[5]	0.0	36.0	0.0	25.3	50.00	PATH
R[6]	0.0	36.1	0.0	25.4	50.00	PATH
R[7]	0.0	36.3	0.0	25.6	50.00	PATH
R[8]	0.0	36.5	0.0	25.8	50.00	PATH
R[9]	0.0	36.7	0.0	26.1	50.00	PATH
fi	---	---	---	---	50.00	PATH
Serial_out	---	---	---	---	50.00	PATH

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>OUTPUT DELAY>

```
Jun 10 08:57 1988  timing_at_92C_4.5V Page 20

********************************************************************************
                Genesil Screen Dump -- Fri Jun 10 07:01:08 1988

********************************************************************************
Chip: ~sni/sni/xserial                                          Timing Analyzer
---------------------------Genesil Version v7.0_Beta---------------------------
VIOLATION MODE
--------------------------------------------------------------------------------
Fabline: NSC_CN12A                        Corner: GUARANTEED
  Junction Temperature:92 deg C           Voltage:4.50v
  External Clock: Proc_clk
Included setup files:
  #0  max_phase_a              (max. temp. min v. for Proc_clk)
--------------------------------------------------------------------------------
                                NO VIOLATIONS
  Hold time check margin: 0.0ns

--------------------------------------------------------------------------------
INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
--------------------------------------------------------------------------------
BACK

--------------------------------------------------------------------------------

>TIMING>VIOLATIONS>
```

Jun 10 08:57 1988 timing_at_92C_4.5V Page 21

****

Genesil Screen Dump -- Fri Jun 10 08:03:31 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

PATH DELAY MODE

Tabline: NSC_CN12A Corner: GUARANTEED
Junction Temperature:92 deg C Voltage:4.50v
External Clock: Proc_clk
Included setup files:
#0 max_phase_a (max. temp. min v. for Proc_clk)

Source Object / Dest. Object	Connector / Connector	PATH DELAY (ns) (Ph1) Min	Max		(Ph2) Min	Max
R bus en[0]	R bus en	16.4	17.8			
Rd[7]	R			PAT	16.4	17.8
R bus en[0]	R bus en	15.7	17.1			
Rc[7]	R			PAT	15.7	17.1
R bus en[0]	R bus en	16.0	17.4			
Rb[7]	R			PAT	16.0	17.4
R bus en[0]	R bus en	16.9	18.3			
Ra[7]	R			PAT	16.9	18.3
R bus en[0]	R bus en	17.2	18.5			
Ra[0]	R			PAT	17.2	18.5
R bus en[1]	R bus en	17.1	18.5			
Rd[7]	R			PAT	17.1	18.5
R bus en[1]	R bus en	16.4	17.8			
Rc[7]	R			PAT	16.4	17.8
R bus en[1]	R bus en	16.7	18.1			
Rb[7]	R			PAT	16.7	18.1
R bus en[1]	R bus en	17.6	19.0			
Ra[7]	R			PAT	17.6	19.0
R bus en[1]	R bus en	17.9	19.2			
Ra[0]	R			PAT	17.9	19.2
IO opcode[0]	IO opcode	22.9	25.1			
Rd[7]	R			PAT	22.9	25.1
IO opcode[0]	IO opcode	21.3	23.3			
Rc[7]	R			PAT	21.3	23.3

BLOCK NAME
CURRENT
Address[0]
Address[1]
Address[2]
Data[0]
Data[1]
Data[2]
Data[3]
Data[4]
Data[5]
Data[6]
Data[7]
Dav
F[0]
F[10]
F[11]
F[12]
F[13]
F[14]
F[15]
F[16]
F[17]
F[18]
F[19]
F[1]
F[20]
F[21]
F[22]
F[23]
F[24]
F[25]
F[26]
F[27]
* MORE *

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PATH_DELETE_TOGGLE

Enter [string]:
>TIMING>PATH DELAY>

Jun 10 08:57 1988 timing_at_92C_4.5V Page 22

****

Genesil Screen Dump -- Fri Jun 10 08:03:42 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

```
-------------------------Genesil Version v7.0 Beta----------+----------------
    Rc[7]              R                          21.3   23.3  PATH   BLOCK NAME
IO opcode[0]    IO opcode                    21.5   23.5        *CURRENT*
    Rb[7]              R                          21.5   23.5  PATHAddress[0]
IO opcode[0]    IO opcode                    23.1   25.4        Address[1]
    Ra[7]              R                          23.1   25.4  PATHAddress[2]
IO opcode[0]    IO opcode                    21.7   23.7        Data[0]
    Ra[0]              R                          21.7   23.7  PATHData[1]
IO opcode[1]    IO opcode                    22.0   23.7        Data[2]
    Rd[7]              R                          22.0   23.7  PATHData[3]
IO opcode[1]    IO opcode                    20.5   21.9        Data[4]
    Rc[7]              R                          20.5   21.9  PATHData[5]
IO opcode[1]    IO opcode                    20.7   22.1        Data[6]
    Rb[7]              R                          20.7   22.1  PATHData[7]
IO opcode[1]    IO opcode                    22.3   24.0        Dav
    Ra[7]              R                          22.3   24.0  PATHF[0]
IO opcode[1]    IO opcode                    20.9   22.3        F[10]
    Ra[0]              R                          20.9   22.3  PATHF[11]
IO opcode[2]    IO opcode                    23.5   25.3        F[12]
    Rd[7]              R                          23.5   25.3  PATHF[13]
IO opcode[2]    IO opcode                    22.0   23.5        F[14]
    Rc[7]              R                          22.0   23.5  PATHF[15]
IO opcode[2]    IO opcode                    22.2   23.7        F[16]
    Rb[7]              R                          22.2   23.7  PATHF[17]
IO opcode[2]    IO opcode                    23.8   25.6        F[18]
    Ra[7]              R                          23.8   25.6  PATHF[19]
IO opcode[2]    IO opcode                    22.3   23.9        F[1]
    Ra[0]              R                          22.3   23.9  PATHF[20]
Address[0]      Address                      23.7   27.4        F[21]
    Data[7]            Data                       23.7   27.4  PATHF[22]
Address[0]      Address                      23.3   26.8        F[23]
    Data[3]            Data                       23.3   26.8  PATHF[24]
Address[0]      Address                      23.3   26.8        F[25]
    Data[0]            Data                       23.3   26.8  PATHF[26]
Address[1]      Address                      21.2   24.0        F[27]
    Data[7]            Data                       21.2   24.0  PATH * MORE *
----------------------------------------------------------+----------------
INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
-------------------------------------------------------------------------------
BACK            PATH_DELETE_TOGGLE


-------------------------------------------------------------------------------

nter [string]:
>TIMING>PATH DELAY>
```

****

Genesil Screen Dump -- Fri Jun 10 08:03:52 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0 Beta----------

Data[3]	Data	23.3	26.8	PATH	BLOCK NAME
Address[0]	Address	23.3	26.8		*CURRENT*
Data[0]	Data	23.3	26.8	PATH	Address[0]
Address[1]	Address	21.2	24.0		Address[1]
Data[7]	Data	21.2	24.0	PATH	Address[2]
Address[1]	Address	20.8	23.4		Data[0]
Data[3]	Data	20.8	23.4	PATH	Data[1]
Address[1]	Address	20.8	23.4		Data[2]
Data[0]	Data	20.8	23.4	PATH	Data[3]
Address[2]	Address	19.6	21.8		Data[4]
Data[7]	Data	19.6	21.8	PATH	Data[5]
Address[2]	Address	19.2	21.3		Data[6]
Data[3]	Data	19.2	21.3	PATH	Data[7]
Address[2]	Address	19.2	21.3		Dav
Data[0]	Data	19.2	21.3	PATH	F[0]
N mem read	N mem read	18.5	20.0		F[10]
Data[7]	Data	18.5	20.0	PATH	F[11]
N mem read	N mem read	18.7	20.2		F[12]
Data[3]	Data	18.7	20.2	PATH	F[13]
N mem read	N mem read	18.8	20.3		F[14]
Data[0]	Data	18.8	20.3	PATH	F[15]
N chip select	N chip select	20.3	21.8		F[16]
Data[7]	Data	20.3	21.8	PATH	F[17]
N chip select	N chip select	20.5	22.0		F[18]
Data[3]	Data	20.5	22.0	PATH	F[19]
N chip select	N chip select	20.6	22.1		F[1]
Data[0]	Data	20.6	22.1	PATH	F[20]
N mem read	N mem read	16.7	18.2		F[21]
N xack	N xack	16.7	18.2	PATH	F[22]
N mem write	N mem write	18.7	20.2		F[23]
N xack	N xack	18.7	20.2	PATH	F[24]
N chip select	N chip select	18.4	20.2		F[25]
N xack	N xack	18.4	20.2	PATH	F[26]
					F[27]
					* MORE *

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK PATH_DELETE_TOGGLE

nter [string]:
>TIMING>PATH DELAY>

```
*******************************************************************************
            Genesil Screen Dump -- Fri Jun 10 12:24:12 1988

*******************************************************************************
Chip: ~sni/sni/xserial                                              Executive
---------------------------Genesil Version v7.0_Beta---------------------------
  Checking file currency . . .
 **** ctrl-C -- ABORT ACTIVITY ****
$UTILITY;
KEY_PARAMETERS

 Key Parameters for Chip  ~sni/sni/xserial
 -----------------------------------------

 ROUTE_VERSION = 87.20
 HEIGHT = 272.2 MILS
    ( = 6913.88 u )
 WIDTH = 300.9 MILS
    ( = 7642.85 u )
 ROUTED = 1 (0=NO,1=YES)
 TOTAL_WIRE_LENGTH = 676194 MILS
    ( = 17175327. u )
 CORE_AREA = 60427.7 SQUARE_MILS
    ( = 38985535. u2 )
 PADRING_AREA = 21468.3 SQUARE_MILS
    ( = 13850489. u2 )
 PAD_AREA = 18413.7 SQUARE_MILS
    ( = 11879782. u2 )
 ROUTE_AREA = 32301.5 SQUARE_MILS
    ( = 20839636. u2 )
 PERCENT_ROUTING_OF_CORE = 53 %
 PERCENT_ROUTING_OF_CHIP = 39 %
 PERCENT_CORE_OF_CHIP = 73 %
 PERCENT_PADRING_OF_CHIP = 26 %
 PERCENT_PAD_OF_PADRING = 85 %

 NETLIST_VERSION = 1.0
 NETLIST_EXISTS = 1 (0=NO,1=YES)

 PHASE_A_TIME = 23.1 NANOSECONDS
 PHASE_B_TIME = 27.0 NANOSECONDS
-------------------------------------------------------------------------------
INSERT  MESSAGES  GRAPHICS                OVERLAY          RECORD      UTILITY
-------------------------------------------------------------------------------
EXIT GENESIL    SELECT_OBJECT   DEFINITION      COMPILE          TOOLING
                                PACKAGE_EDIT    SIMULATION       PLOT
                                                TIMING           TRANSLATE
                                                ATG
-------------------------------------------------------------------------------
>
```

```
**********************************************************************************
                Genesil Screen Dump -- Fri Jun 10 12:24:30 1988

**********************************************************************************
Chip: ~sni/sni/xserial                                                    Executive
---------------------------Genesil Version v7.0_Beta----------------------------
) PHASE_B_TIME = 27.0 NANOSECONDS
) SYMMETRIC_TIME = 78.2 NANOSECONDS
) NUMBER_OF_TRANSISTORS = 60356
) POWER_DISSIPATION = 616.49 MILLIWATTS_@5V_10MHZ
)
)
) ROUTE_ESTIMATE_LVL = 0
) FLAT_ROUTE = 1 (0=NO,1=YES)
) TECHNOLOGY_NAME = CMOS-1
) PACKAGE_SPECIFIED = 0 (0=NO,1=YES)
) FABLINE_NAME = NSC_CN12A
) COMPILER_TYPE = GCX
)
) FLOORPLAN_VERSION = 7.0
) BOND_PAD_CNT = 120
) HEIGHT_ESTIMATE = 134.63 MILS
)    ( = 3419.602 u )
) WIDTH_ESTIMATE = 134.15 MILS
)    ( = 3407.409 u )
) FUSED = 1 (0=NO,1=YES)
) FUSION_REQUIRED = 1 (0=NO,1=YES)
) PINOUT = 1 (0=NO,1=YES)
) PINOUT_REQUIRED = 1 (0=NO,1=YES)
) PLACED = 1 (0=NO,1=YES)
) PLACEMENT_REQUIRED = 1 (0=NO,1=YES)
)
)
) AREA = 81905.0 SQUARE_MILS
)    ( = 52841830. u2 )
) OBJECT_TYPE = Chip
) AREA_PER_TRANSISTOR = 1.357032 SQUARE_MILS
)    ( = 875.502744 u2 )
) PHYSICAL_IMPLEMENTATIONS_EXIST = 0 (0=NO,1=YES)
) CHECKPOINTS_EXIST = 1 (0=NO,1=YES)
) Genesil internal fault:  Please file a bug report, if needed.
----------------------------------------------------------------------------------
 INSERT  MESSAGES  GRAPHICS                  OVERLAY          RECORD      UTILITY
----------------------------------------------------------------------------------
EXIT GENESIL    SELECT_OBJECT   DEFINITION      COMPILE          TOOLING
                                PACKAGE_EDIT    SIMULATION       PLOT
                                                TIMING           TRANSLATE
                                                ATG
----------------------------------------------------------------------------------
>
```

```
func designinit {
  toggle Proc_clk 0 '(0 5 10)
  toggle Net_clk 0 '(0 5 10)
  tag Proc_clk cycle rising
  tag Proc_clk step rising
  tag Net_clk step falling
  tag Net_clk cycle none
  showtoggles

func async_setup{
  toggle Proc_clk 0 '(3 13 23 33 43)
  toggle Net_clk 0 '(8 18 28 38 48)
  tag Proc_clk cycle rising
  tag Net_clk cycle rising
  tag Proc_clk step falling rising
  tag Net_clk step falling rising
  showtoggles
}
```

Jun 10 12:37 1988 nom_phase_a.040 Page 1

```
LABEL nominal op. cond. for Proc_clk
TEMP_VOLT 47 5.00
HOLDTIME_MARGIN 0.00
SELECT_EXT_CLOCK Proc_clk
IGNORE_PATH Data[0]/host_dout Data[0]/host_din
IGNORE_PATH Data[1]/host_dout Data[1]/host_din
IGNORE_PATH Data[2]/host_dout Data[2]/host_din
IGNORE_PATH Data[3]/host_dout Data[3]/host_din
IGNORE_PATH Data[4]/host_dout Data[4]/host_din
IGNORE_PATH Data[5]/host_dout Data[5]/host_din
IGNORE_PATH Data[6]/host_dout Data[6]/host_din
IGNORE_PATH Data[7]/host_dout Data[7]/host_din
IGNORE_PATH Data[0]/read_disable Data[0]/host_din
IGNORE_PATH Data[1]/read_disable Data[1]/host_din
IGNORE_PATH Data[2]/read_disable Data[2]/host_din
IGNORE_PATH Data[3]/read_disable Data[3]/host_din
IGNORE_PATH Data[4]/read_disable Data[4]/host_din
IGNORE_PATH Data[5]/read_disable Data[5]/host_din
IGNORE_PATH Data[6]/read_disable Data[6]/host_din
IGNORE_PATH Data[7]/read_disable Data[7]/host_din
```

```
LABEL nominal op. cond. for Net_clk
TEMP_VOLT 47 5.00
 HOLDTIME_MARGIN 0.00
 SELECT_EXT_CLOCK Net_clk
 IGNORE_PATH Data[0]/host_dout Data[0]/host_din
 IGNORE_PATH Data[1]/host_dout Data[1]/host_din
 IGNORE_PATH Data[2]/host_dout Data[2]/host_din
 IGNORE_PATH Data[3]/host_dout Data[3]/host_din
 IGNORE_PATH Data[4]/host_dout Data[4]/host_din
 IGNORE_PATH Data[5]/host_dout Data[5]/host_din
 IGNORE_PATH Data[6]/host_dout Data[6]/host_din
 IGNORE_PATH Data[7]/host_dout Data[7]/host_din
 IGNORE_PATH Data[0]/read_disable Data[0]/host_din
 IGNORE_PATH Data[1]/read_disable Data[1]/host_din
 IGNORE_PATH Data[2]/read_disable Data[2]/host_din
 IGNORE_PATH Data[3]/read_disable Data[3]/host_din
 IGNORE_PATH Data[4]/read_disable Data[4]/host_din
 IGNORE_PATH Data[5]/read_disable Data[5]/host_din
 IGNORE_PATH Data[6]/read_disable Data[6]/host_din
 IGNORE_PATH Data[7]/read_disable Data[7]/host_din
```

```
LABEL max. temp. min v. for Proc_clk
TEMP_VOLT 92 4.50
 HOLDTIME_MARGIN 0.00
SELECT_EXT_CLOCK Proc_clk
IGNORE_PATH Data[0]/host_dout Data[0]/host_din
 IGNORE_PATH Data[1]/host_dout Data[1]/host_din
 IGNORE_PATH Data[2]/host_dout Data[2]/host_din
IGNORE_PATH Data[3]/host_dout Data[3]/host_din
IGNORE_PATH Data[4]/host_dout Data[4]/host_din
 IGNORE_PATH Data[5]/host_dout Data[5]/host_din
IGNORE_PATH Data[6]/host_dout Data[6]/host_din
IGNORE_PATH Data[7]/host_dout Data[7]/host_din
 IGNORE_PATH Data[0]/read_disable Data[0]/host_din
 IGNORE_PATH Data[1]/read_disable Data[1]/host_din
IGNORE_PATH Data[2]/read_disable Data[2]/host_din
IGNORE_PATH Data[3]/read_disable Data[3]/host_din
 IGNORE_PATH Data[4]/read_disable Data[4]/host_din
IGNORE_PATH Data[5]/read_disable Data[5]/host_din
IGNORE_PATH Data[6]/read_disable Data[6]/host_din
IGNORE_PATH Data[7]/read_disable Data[7]/host_din
```

```
LABEL max. temp. min v. for Net_clk
TEMP_VOLT 92 4.50
HOLDTIME_MARGIN 0.00
SELECT_EXT_CLOCK Net_clk
IGNORE_PATH Data[0]/host_dout Data[0]/host_din
IGNORE_PATH Data[1]/host_dout Data[1]/host_din
IGNORE_PATH Data[2]/host_dout Data[2]/host_din
IGNORE_PATH Data[3]/host_dout Data[3]/host_din
IGNORE_PATH Data[4]/host_dout Data[4]/host_din
IGNORE_PATH Data[5]/host_dout Data[5]/host_din
IGNORE_PATH Data[6]/host_dout Data[6]/host_din
IGNORE_PATH Data[7]/host_dout Data[7]/host_din
IGNORE_PATH Data[0]/read_disable Data[0]/host_din
IGNORE_PATH Data[1]/read_disable Data[1]/host_din
IGNORE_PATH Data[2]/read_disable Data[2]/host_din
IGNORE_PATH Data[3]/read_disable Data[3]/host_din
IGNORE_PATH Data[4]/read_disable Data[4]/host_din
IGNORE_PATH Data[5]/read_disable Data[5]/host_din
IGNORE_PATH Data[6]/read_disable Data[6]/host_din
IGNORE_PATH Data[7]/read_disable Data[7]/host_din
```

****

Genesil Screen Dump -- Fri Jun 24 07:41:46 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

VIOLATION MODE

Fabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:47 deg C Voltage:5.00v

External Clock: Net_clk

Included setup files:

#0 nom_phase_c (nominal op. cond. for Net_clk)

NO VIOLATIONS

Hold time check margin: 2.0ns

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>VIOLATIONS>

****

Genesil Screen Dump -- Fri Jun 24 13:08:03 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

VIOLATION MODE

Fabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:47 deg C Voltage:5.00v

External Clock: Proc_clk

Included setup files:

#0 nom_phase_a (nominal op. cond. for Proc_clk)

NO VIOLATIONS

Hold time check margin: 2.0ns

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>VIOLATIONS>

```
**********************************************************************
              Genesil Screen Dump -- Fri Jun 24 15:43:49 1988
**********************************************************************
Chip: ~sni/sni/xserial                                      Timing Analyzer
--------------------------Genesil Version v7.0_Beta--------------------------
VIOLATION MODE
----------------------------------------------------------------------------
Fabline: NSC_CN12A                          Corner: GUARANTEED
  Junction Temperature:92 deg C             Voltage:4.50v
  External Clock: Net_clk
 Included setup files:
  #0  max_phase_c              (max. temp. min v. for Net_clk)
----------------------------------------------------------------------------
                                NO VIOLATIONS
  Hold time check margin: 2.0ns

----------------------------------------------------------------------------
 INSERT  MESSAGES  GRAPHICS  FORM          OVERLAY          RECORD      UTILITY
----------------------------------------------------------------------------
BACK

----------------------------------------------------------------------------

>TIMING>VIOLATIONS>
```

****

Genesil Screen Dump -- Sun Jun 26 09:12:39 1988

****

Chip: ~sni/sni/xserial Timing Analyzer

----------Genesil Version v7.0_Beta----------

VIOLATION MODE

Fabline: NSC_CN12A Corner: GUARANTEED

Junction Temperature:92 deg C Voltage:4.50v

External Clock: Proc_clk

Included setup files:

#0 max_phase_a (max. temp. min v. for Proc_clk)

NO VIOLATIONS

Hold time check margin: 2.0ns

INSERT MESSAGES GRAPHICS FORM OVERLAY RECORD UTILITY

BACK

>TIMING>VIOLATIONS>